

5 MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



PART NUMBER SYSTEM

● Part Number System

1	2	3	4	5	6	7	8
Series Name	Rated Voltage	Capacitance	Cap. Tol.	Case Diameter	Case Height	Lead Taping Forming and Cutting	Internal Control Code

1 Series Name
See page 7

2 Rated Working Voltage

WV	2.5	4	6.3	10	16	20	25
Code	0E	0G	0J	1A	1C	1D	1E

WV	35	40	50	63	80	100	160
Code	1V	1G	1H	1J	1K	2A	2C

WV	200	250	315	350	400	450	500
Code	2D	2E	2F	2V	2G	2W	2H

3 Capacitance

ex) 4.7 μ F 475
 47 μ F 476
 470 μ F 477
 4700 μ F 478
 47000 μ F 479

4 Capacitance Tolerance

Tolerance (%)	± 10	± 20	-10 $+20$	-10 $+30$	-10 $+50$
Code	K	M	V	Q	T

5 Case Diameter

ex) $\varnothing 4$ 04 $\varnothing 12.5$ 12
 $\varnothing 5$ 05 $\varnothing 16$ 16
 $\varnothing 6.3$ 6L $\varnothing 18$ 18
 $\varnothing 8$ 08 $\varnothing 22$ 22
 $\varnothing 10$ 10

6 Case Height

ex) 5mm 005
 11mm 011
 12.5mm 12M
 20mm 020
 31.5mm 31M
 35.5mm 35M

7 Lead Taping, Forming and Cutting
See pages 94 ~ 96

PACKING

● BULK PACKING QUANTITY(pcs) / BOX


SIZE		BULK (QUANTITY)		
ØD	L(mm)	V-Bag	INNER BOX	MIDDLE BOX
4	5, 7	500	10000	40000
5	5, 7, 9, 11	500	7000	28000
6.3	5, 7, 9, 11	500	6000	24000
8	5	500	5000	20000
	9, 11.5	300	3600	14400
10	9, 12.5	200	2400	9600
	16	200	2000	8000
	20, 25	200	1600	6400
12.5	16	100	1200	4800
	20	100	1000	4000
	25	100	900	3600
16	16	100	800	3200
	20	50	600	2400
	25	50	500	2000
	31.5, 35.5	50	400	1600
18	16	50	600	2400
	20	50	500	2000
	20, 25, 31.5	50	400	1600
	35.5	50	300	1200

● CUTTING PACKING QUANTITY(pcs) / BOX


SIZE		CUTTING (QUANTITY)		
ØD	L(mm)	V-Bag	INNER BOX	MIDDLE BOX
4	5, 7	500	9000	36000
5	5, 7, 9, 11	500	7000	28000
6.3	5, 7, 9, 11	500	6000	24000
8	5	500	5000	20000
	9, 11.5	300	3600	14400
10	9	-	1000	16000
	12.5	-	800	12800
	16	-	600	9600
	20	-	500	8000
	25	-	400	6400
	30	-	400	6400
	40 ↑	-	900	1800
12.5	16	-	400	6400
	20	-	300	4800
	25	-	250	4000
	40 ↑	-	600	1200
16	16	-	400	1200
	20	-	400	1200
	25, 31.5	-	400	1200
	35.5	-	400	1200
	40 ↑	-	400	1200
18	16	-	300	900
	20	-	300	900
	25	-	300	900
	31.5, 35.5	-	300	900
	40 ↑	-	300	900
20	41	-	240	720
22	35.5 ↓	-	200	600
	40 ↑	-	200	600

TAPING

● Ammo

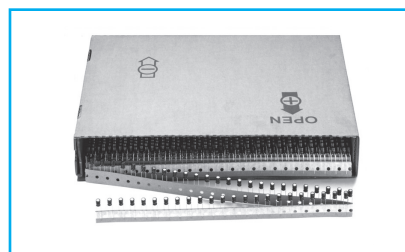

● Lead Taping Capacitors for Automatic Insertion

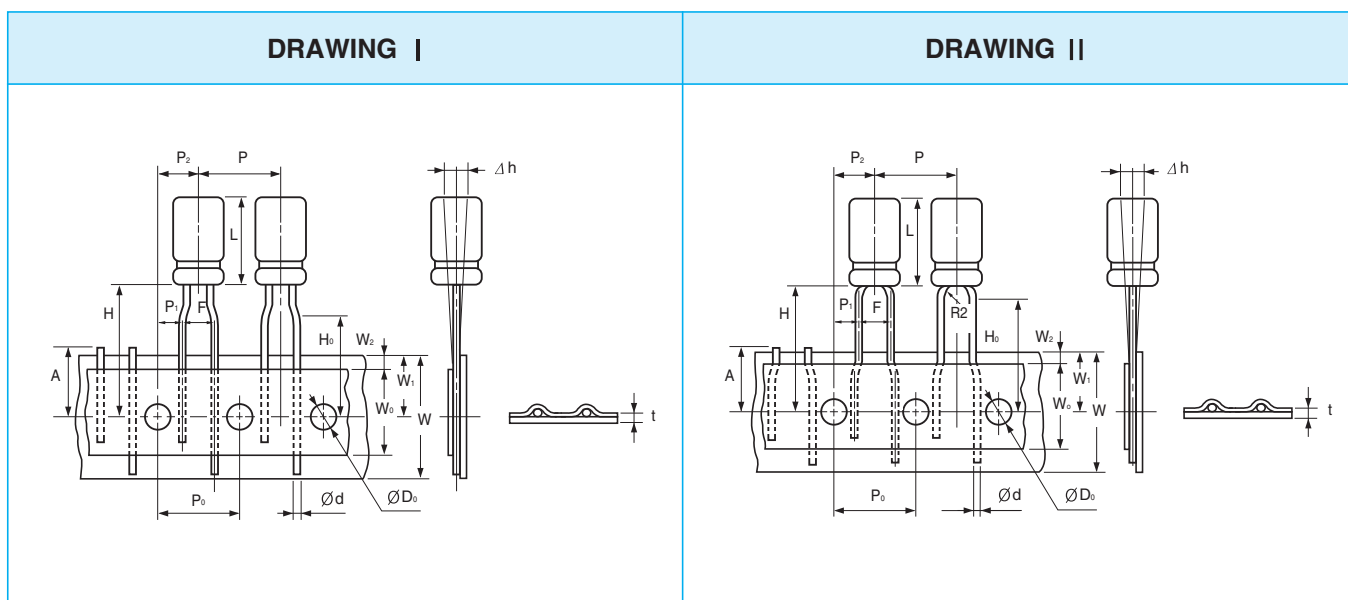

● DIMENSIONS


Unit : mm

Applicable Drawing No.			I (II)			III			I						
Description	Symbol	Tolerance	Ø4	Ø5		Ø6.3		Ø8	Ø4	Ø5		Ø6.3		Ø8	
Case Height	L	*Note	5, 7	5	7~11	5	7~11	5	5, 7	5	7~11	5	7~11	5	9,11.5
Lead Dia.	d	±0.05	0.45	0.45	0.5	0.45	0.5	0.45	0.45	0.45	0.5	0.45	0.5	0.45	0.6
Body Pitch	P	±1.0	12.7			12.7	12.7	12.7						12.7	12.7
Feeding Hole Pitch	P ₀	±0.2	12.7			12.7	12.7	12.7						12.7	12.7
Feeding Hole Alignment	P ₁	±0.7	5.1			5.1	5.1	3.85						3.85	3.85
Feeding Hole Alignment	P ₂	±1.0	6.35			6.35	6.35	6.35						6.35	6.35
Lead Center Spacing	F	^{+0.6} _{-0.2}	2.5			2.5	2.5	5.0						5.0	5.0
Body Inclination	Δh	±2.0	0			0	0	0						0	0
Tape Width	W	±0.5	18.0			18.0	18.0	18.0						18.0	18.0
Adhesive Tape Width	W ₀	min.	9.5			9.5	9.5	9.5						9.5	12.5
Feeding Hole Alignment	W ₁	±0.5	9.0			9.0	9.0	9.0						9.0	9.0
Adhesive Tape Margin	W ₂	max.	2.0			2.0	2.0	2.0						2.0	2.0
Length from Seating Plane	H	±0.5	17.5 (18.0)			17.5	18.5	18.5 (5, 7mmL = 17.5)						17.5	20.0
Lead Clinch Height	H ₀	±0.5	16.5 (17.0)			—	—	16.5						16.5	16.5
Feeding Hole Dia.	ØD ₀	±0.2	4.0			4.0	4.0	4.0						4.0	4.0
Total Tape Thickness	t	±0.2	0.6			0.6	0.6	0.6						0.6	0.6
Cut Lead Height	A	max.	11.0			11.0	11.0	11.0						11.0	11.0
Taping Code	Ammo	⊕ leader	PB(PC)			PC	PE	PA						PA	PG

* Note : Refer to the drawing of each series for tolerance.

TAPING

● Lead Taping Capacitors for Automatic Insertion

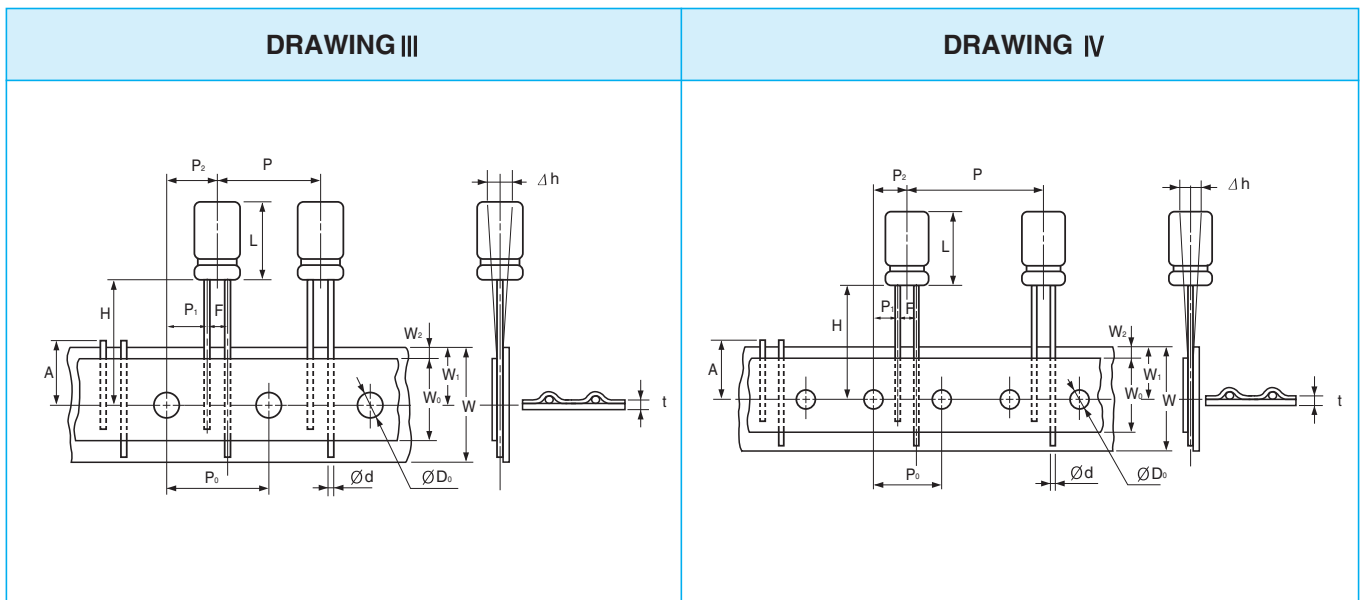


● DIMENSIONS

Unit : mm

Applicable Drawing No.			III	III	IV	IV	IV
Description	Symbol	Tolerance	Ø 10	Ø 12.5	Ø 16	Ø 18	Ø 18
Case Height	L	max.	27.0	27.0	37.5	37.5	37.5
Lead Dia.	d	±0.05	0.6	0.6	0.8	0.8	0.8
Body Pitch	P	±1.0	12.7	15.0	25.4	30.0	30.0
Feeding Hole Pitch	P ₀	±0.2	12.7	15.0	12.7	15.0	15.0
Feeding Hole Alignment	P ₁	±0.7	3.85	5.0	3.85	3.75	3.75
Feeding Hole Alignment	P ₂	±1.0	6.35	7.5	6.35	7.5	7.5
Lead Center Spacing	F	+0.6 -0.2	5.0	5.0	7.5	7.5	7.5
Body Inclination	Δh	±2.0	0	0	0	0	0
Tape Width	W	±0.5	18.0	18.0	18.0	18.0	18.0
Adhesive Tape Width	W ₀	min.	12.5	12.5	12.5	12.5	12.5
Feeding Hole Alignment	W ₁	±0.5	9.0	9.0	9.0	9.0	9.0
Adhesive Tape Margin	W ₂	max.	2.0	2.0	2.0	2.0	2.0
Length from Seating Plane	H	±0.5	18.5	18.5	18.5	18.5	18.5
Feeding Hole Dia.	ØD ₀	±0.2	4.0	4.0	4.0	4.0	4.0
Total Tape Thickness	t	±0.2	0.6	0.7	0.7	0.7	0.7
Cut Lead Height	A	max.	11.0	11.0	11.0	11.0	11.0
Taping Code	Ammo	⊕ leader	PA	PH	PL	PA	PA

● PACKAGING Q'ty(pcs.)/Box

Unit : mm


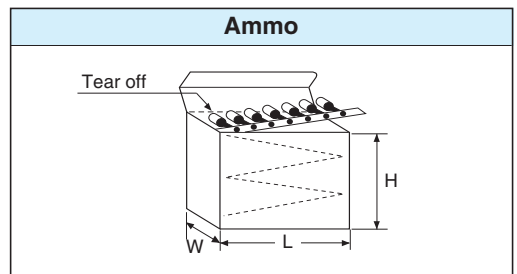




Size		Ammo			
ØD	Case Height	L	H	W	Q'ty
4	5, 7	332	230	42	2500
5	5, 7	332	230	49	2000
6.3	5, 7	332	230	42	1500
8	5	332	230	42	1000
10	9, 12.5, 16	332	190	51	500
12.5	16, 20, 25	342	240	62	400
16	16, 20, 25	342	240	62	250
18	16, 20, 25	342	240	62	200

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

● Lead Forming & Cutting



Unit : mm

Configurations	Case dia.	Shape	Code	Drawing	
				L	F
T - Type	$\varnothing D \leq 8$		TS	4.5	5.0
S - Type	$\varnothing D \geq 10$		SS	4.5	-
F - Type	$\varnothing D \leq 8$		FS	5.0	5.0
C - Type	ALL		CS	5.0	-

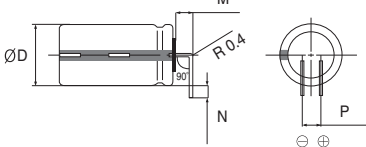Configurations	Case dia.	Shape		Drawing	
				M	N
	$\varnothing D \geq 8$			M	N
D - Type	Code	DL	DR	3.0	3.2
H - Type		HL	HR	3.0	3.7
M - Type		ML	MR	6.0	2.5
Q - Type		QL	QR	6.0	1.5
J - Type		JL	JR	6.0	0.5

SD Standard, For General Purposes Series


- Standard series for general purposes
- High voltage, high capacitance series
- Voltage range of 6.3~500V
- Complied to the RoHS directive



Item	Characteristics											
Operating temperature range	WV				6.3 ~ 450				500			
	Temperature range				-40 ~ +85°C				-25 ~ +85°C			
Leakage current max.	WV ≤ 100								WV > 100			
	I = 0.01CV or 3μA whichever is greater (after 2 min) I = 0.03CV or 4μA whichever is greater (after 1 min)								I = 0.02CV+15μA (after 5 min)			
Capacitance tolerance	± 20% at 120Hz, 20°C											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.											
	WV	6.3	10	16	25	35	50	63	100	160 ~ 250	350 ~ 500	
	tanδ	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.15	0.20	
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3	10	16	25	35	50~100	160	200~350	400~450	500
	Z-25°C/Z+20°C		5	4	3	2	2	2	4	6	10	12
	Z-40°C/Z+20°C		12	10	8	5	4	3	6	8	12	—
Load life (after application of the rated voltage for 2000 hours at 85°C)	Leakage current				Less than specified value							
	Capacitance change				Within ±20% of initial value							
	tanδ				Less than 200% of specified value							
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4											

DRAWING

Unit : mm

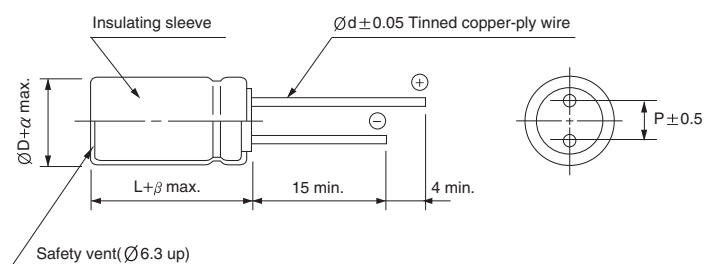

ØD	5	6.3	8	10	12.5	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
α	0.5							1.0
β	1.5		2.0					3.0

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	Frequency µF	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz≤
6.3~100	~ 47	0.75	1.00	1.55	2.00	2.00	2.00
	68 ~ 680	0.80	1.00	1.35	1.50	1.62	1.75
	1000 ~	0.85	1.00	1.15	1.15	1.32	1.50
160~500	~ 220	0.80	1.00	1.40	1.60	1.70	1.80
	330 ~	0.90	1.00	1.13	1.15	1.32	1.50

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

SD series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	500
1.0						5×11 21	5×11 23	5×11 23						8×11.5 26	
1.5						5×11 26	5×11 28	5×11 28						8×11.5 32	
2.2						5×11 32	5×11 34	5×11 34						8×11.5 33	
3.3						5×11 39	5×11 42	5×11 42	6.3×11 45	6.3×11 45	6.3×11 48	8×11.5 53	8×11.5 56	8×11.5 50	
4.7						5×11 46	5×11 50	5×11 50	6.3×11 53	6.3×11 57	6.3×11 57	8×11.5 66	10×12.5 61	10×12.5 72	10×16 69
6.8						5×11 56	5×11 60	5×11 60	8×11.5 76	8×11.5 76	8×11.5 76	10×12.5 88	10×12.5 87	10×16 86	10×16 76
10						5×11 68	5×11 72	5×11 76	8×11.5 96	8×11.5 96	10×12.5 107	10×12.5 107	10×16 115	10×20 115	12.5×25 178
15						5×11 83	5×11 89	6.3×11 89	10×12.5 131	10×16 143	10×16 143	10×20 156	12.5×20 165	12.5×20 164	
22						5×11 101	5×11 108	6.3×11 124	10×12.5 156	10×16 173	10×16 170	12.5×20 222	12.5×20 218	12.5×25 217	16×25 265
33						5×11 123	6.3×11 151	8×11.5 178	10×16 209	10×20 232	10×20 247	16×20 297	12.5×25 296	16×25 294	16×31.5 310
47					5×11 131	*6.3×11 169	6.3×11 181	8×11.5 222	10×20 293	10×20 293	12.5×20 319	16×20 353	16×25 387	16×31.5 384	18×31.5 412
68				5×11 144	*6.3×11 182	6.3×11 203	8×11.5 256	10×12.5 293	12.5×20 391	12.5×25 426	16×20 425	16×25 465	16×31.5 488	16×35.5 503	18×35.5 457
100			5×11 162	* 5×11 181	6.3×11 220	8×11.5 291	8×11.5 311	10×16 388	12.5×25 516	16×25 516	16×25 564	18×31.5 592	18×35.5 667	18×40 546	
150			* 5×11 198	6.3×11 246	8×11.5 318	10×12.5 414	10×12.5 422	10×20 528	16×20 632	16×25 691	16×31.5 726	18×40 845	18×40 863	22×45 1283	
220	5×11 201	* 5×11 218	6.3×11 276	6.3×11 327	8×11.5 386	10×12.5 501	10×16 586	12.5×20 737	16×25 873	18×31.5 962	18×35.5 988	22×41 1112	22×45 1183		
330	*6.3×11 283	6.3×11 307	6.3×11 359	8×11.5 431	10×12.5 549	10×16 672	10×20 784	12.5×25 1002	16×35.5 1152	18×35.5 1206	22×41 1495				
470	6.3×11 338	6.3×11 366	8×11.5 476	10×12.5 550	10×16 740	10×20 875	12.5×20 1098	16×25 1328	18×40 1434	22×41 1495					
680	8×11.5 480	8×11.5 520	8×11.5 600	10×16 754	10×20 947	12.5×20 1235	12.5×25 1440	16×31.5 1643	22×41 1831						
1000	8×11.5 581	10×12.5 659	10×12.5 796	10×16 942	12.5×20 1306	12.5×25 1633	16×25 1937	18×31.5 1965							
2200	10×16 983	10×16 1051	10×20 1331	12.5×20 1542	16×25 2032	16×31.5 2220	18×31.5 2445								
3300	10×20 1286	12.5×20 1545	12.5×20 1686	16×25 2194	16×31.5 2502	18×31.5 2765	18×40 2987								
4700	12.5×20 1736	12.5×25 1903	12.5×25 2129	16×25 2448	16×35.5 2905	18×40 3272									
6800	12.5×25 2129	16×25 2332	16×25 2577	18×31.5 3114	18×40 3408	← Case size ØD×L (mm) ← Ripple current (mA rms) at 85°C, 120Hz									
10000	16×25 2629	16×31.5 2830	16×31.5 3176	18×40 3544											
15000	16×35.5 2959	16×35.5 3284	18×35.5 3656												
22000	18×40 3733	18×40 3843	22×41 4012												

Size Ø8×9 is available for capacitors marked "★"


SD series

TYPICAL PERFORMANCE

— 16V 1000 μ F
 400V 10 μ F


● TEMPERATURE CHARACTERISTICS

Capacitance change vs. temperature

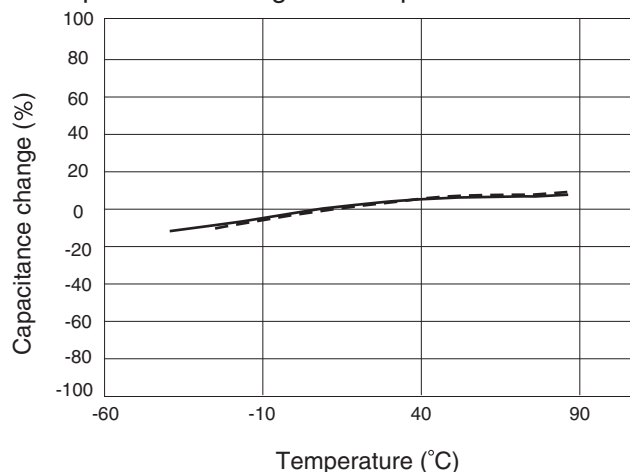


● LOAD LIFE (at +85°C)


Capacitance change vs. time

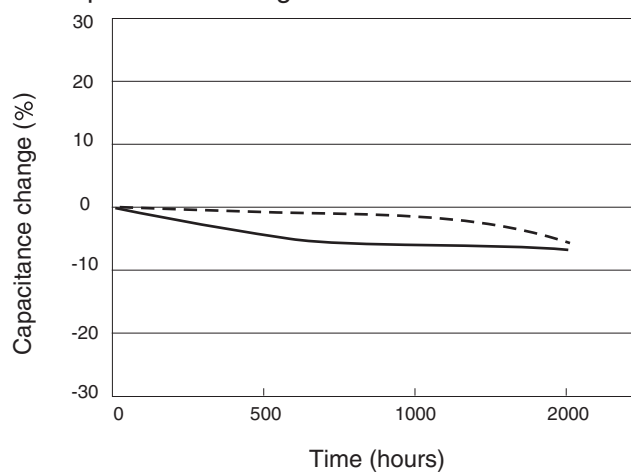

Dissipation factor vs. temperature

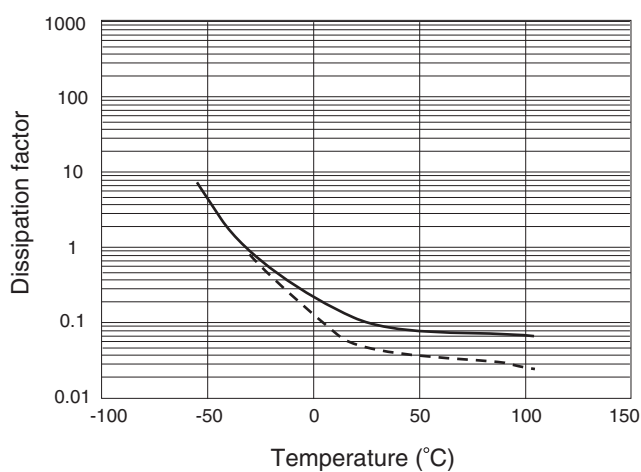


Dissipation factor vs. time

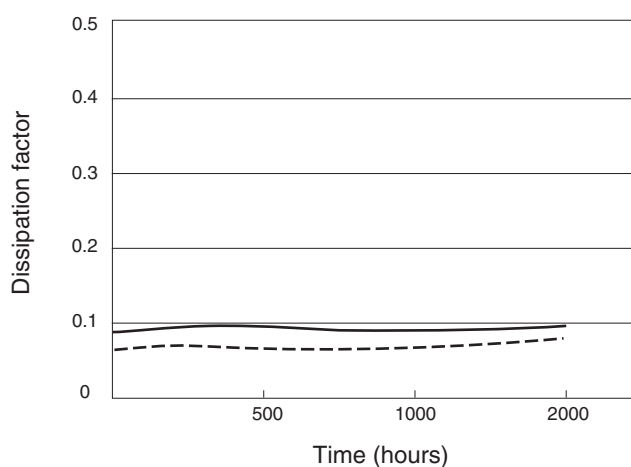


● FREQUENCY CHARACTERISTICS

Impedance vs. frequency

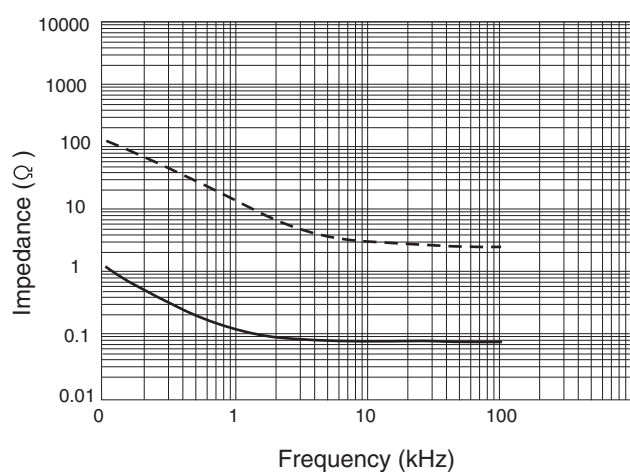

Leakage current vs. time

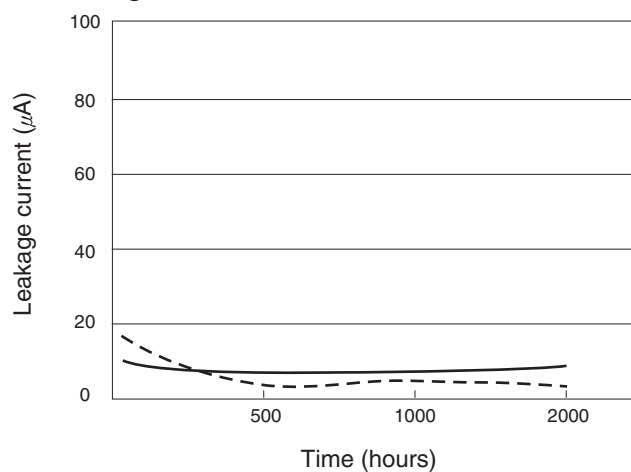


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



Standard, Height 7mmL
Series

- Super miniature series with 7mmL height
- Suited for use in compact audio equipment
- Load life of 2000 hours at 85°C
- Complied to the RoHS directive



Item	Characteristics								
Operating temperature range	-40 ~ +85℃								
Leakage current max.	I = 0.01CV or 4μA whichever is greater (after 1 minute)								
Capacitance tolerance	±20% at 120Hz, 20℃								
Dissipation factor max. (at 120Hz, 20℃)	WV	4	6.3	10	16	25	35, 40	50	63
	tanδ	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV		4	6.3	10	16, 25		35 ~ 63	
	Z-25℃/Z+20℃		6	4	3	2		2	
	Z-40℃/Z+20℃		12	8	6	4		3	
Load life (after application of the rated voltage for 2000 hours at 85℃)	Leakage current			Less than specified value					
	Capacitance change			Within ±20% of initial value					
	tanδ			Less than 200% of specified value					
Shelf life (at 85℃)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20℃ by the KS C IEC 60384 - 4								

● DRAWING (See page 107)

Unit : mm

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	4		6.3		10		16		25		35		40		50		63									
1.0															4 × 7	14	4 × 7	14								
1.5															4 × 7	17	4 × 7	17								
2.2															4 × 7	21	4 × 7	21								
3.3															4 × 7	25	4 × 7	25								
4.7															4 × 7	30	4 × 7	30								
6.8											4 × 7	33	4 × 7	33	4 × 7	37	5 × 7	42								
10								4 × 7	37	4 × 7	40	4 × 7	40	5 × 7	51	5 × 7	51	51								
15							4 × 7	43	4 × 7	46	5 × 7	57	5 × 7	57	6.3 × 7	72	6.3 × 7	72								
22					4 × 7	46	4 × 7	52	5 × 7	64	5 × 7	69	6.3 × 7	80	6.3 × 7	88										
33	4 × 7	43	4 × 7	52	4 × 7	57	5 × 7	73	5 × 7	78	6.3 × 7	98	6.3 × 7	98												
47	4 × 7	51	4 × 7	62	5 × 7	78	5 × 7	87	6.3 × 7	108																
68	5 × 7	71	5 × 7	86	5 × 7	94	6.3 × 7	122	↑	↑																
100	5 × 7	86	5 × 7	104	6.3 × 7	132	6.3 × 7	148	Ripple current (mA rms) at 85°C, 120Hz Case size ØD × L (mm)																	
150	6.3 × 7	122	6.3 × 7	148	6.3 × 7	162																				
220	6.3 × 7	148	6.3 × 7	179																						


— Ripple current (mA rms) at 85°C, 120Hz
— Case size $\varnothing D \times L$ (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF \ Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz $\leq$
~ 47	0.75	1.00	1.55	2.00	2.00	2.00
68 ~	0.80	1.00	1.35	1.50	1.62	1.75

SE Standard, Height 5mmL Series

- Ultra miniature series with 5mmL height
- Suitable to replace tantalum capacitors at low cost
- Load life of 2000 hours at 85°C
- Complied to the RoHS directive



Item	Characteristics									
Operating temperature range	-40 ~ +85℃									
Leakage current max.	I = 0.01CV or 4μA whichever is greater (after 1 minute)									
Capacitance tolerance	±20% at 120Hz, 20℃									
Dissipation factor max. (at 120Hz, 20℃)	WV	4	6.3	10	16	25	35	50	63	
	tanδ	0.35	0.24	0.20	0.16	0.13	0.12	0.09	0.09	
Low temperature characteristics (Impedance ratio at 120Hz)	WV		4		6.3		10		16 ~ 63	
	Z-25℃/Z+20℃		6		4		3		2	
	Z-40℃/Z+20℃		12		8		6		4	
Load life (after application of the rated voltage for 2000 hours at 85℃)	Leakage current				Less than specified value					
	Capacitance change				Within ±20% of initial value					
	tanδ				Less than 200% of specified value					
Shelf life (at 85℃)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20℃ by the KS C IEC 60384 - 4									

● DRAWING (See page 108)

Unit : mm

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	4	6.3	10	16	25	35	50	63
1.0							4×5	13
1.5							4×5	16
2.2						4×5	17	19
3.3					4×5	20	4×5	24
4.7				4×5	21	4×5	23	24
6.8			4×5	23	4×5	25	4×5	28
10	4×5	21	4×5	25	4×5	28	4×5	31
15	4×5	26	4×5	31	4×5	34	5×5	44
22	4×5	31	4×5	37	5×5	47	5×5	53
33	4×5	38	5×5	53	5×5	58	6.3×5	76
47	4×5	45	5×5	63	6.3×5	81	6.3×5	91
68	5×5	63	6.3×5	89	6.3×5	98	6.3×5	109
100	5×5	89	6.3×5	108	8×5	140	8×5	157
150	6.3×5	109	8×5	157	8×5	172	8×5	192
220	6.3×5	133	8×5	190	8×5	208		
330	8×5	192						

↑ ↑

Ripple current (mA rms) at 85°C, 120Hz
Case size ØD × L (mm)


● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF \ Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 47	0.75	1.00	1.55	2.00	2.00	2.00
68 ~	0.80	1.00	1.35	1.50	1.62	1.75

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



Wide Temperature Range Series




- Standard series for general purpose
- High CV value
- Wide operating temperature range of -55 ~ +105°C
- Complied to the RoHS directive



Item	Characteristics											
Operating temperature range	WV		6.3 ~ 100				160 ~ 450			500		
	Temperature range		-55 ~ +105°C				-40 ~ +105°C			-25 ~ +105°C		
Leakage current max.	WV ≤ 100								WV > 100			
	I = 0.01CV or 3μA whichever is greater (after 2 min) I = 0.03CV or 4μA whichever is greater (after 1 min)								I = 0.02CV+15μA (after 5 min)			
Capacitance tolerance	±20% at 120Hz, 20°C											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.											
	WV	6.3	10	16	25	35	50	63	100	160~250	350~500	
	tanδ	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.15	0.20	
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3	10	16	25	35	50~100	160	200~350	400~450	500
	Z-25°C/Z+20°C		5	4	3	2	2	2	4	6	10	12
	Z-40°C/Z+20°C		12	10	8	5	4	3	6	8	12	—
Load life (after application of the rated voltage for 2000 hours at 105°C)	Leakage current					Less than specified value						
	Capacitance change					Within ±20% of initial value						
	tanδ					Less than 200% of specified value						
	ØD				ØD ≤ 8				ØD ≥ 10			
	Life time				1000 hours				2000 hours			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4											

DRAWING

Unit : mm

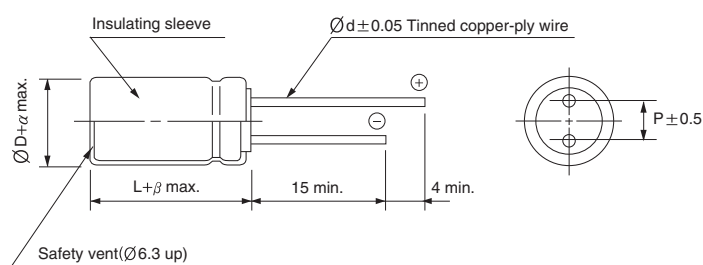

ØD	5	6.3	8	10	12.5	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
α	0.5							1.0
β	1.5		2.0				3.0	

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	Frequency µF	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
6.3~100	~ 47	0.75	1.00	1.55	2.00	2.00	2.00
	68 ~ 680	0.80	1.00	1.35	1.50	1.62	1.75
	820 ~	0.85	1.00	1.15	1.15	1.32	1.50
160~500	~ 220	0.80	1.00	1.40	1.60	1.70	1.80
	330 ~	0.90	1.00	1.13	1.15	1.32	1.50

RD series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	500
2.2						5×11 24	5×11 26	5×11 26	6.3×11 23	6.3×11 23	6.3×11 23	8×11.5 28	8×11.5 28	10×12.5 27	
3.3						5×11 29	5×11 32	5×11 32	6.3×11 29	6.3×11 29	8×11.5 34	8×11.5 34	10×12.5 39	10×16 36	
4.7						5×11 35	5×11 38	5×11 38	6.3×11 34	8×11.5 40	8×11.5 40	10×12.5 47	10×12.5 47	10×16 43	10×16 59
6.8						5×11 42	5×11 46	5×11 46	8×11.5 49	10×12.5 56	10×12.5 56	10×16 62	10×16 62	10×16 52	10×16 72
10						5×11 51	5×11 56	5×11 56	10×12.5 68	10×12.5 68	10×12.5 68	10×16 75	10×20 82	12.5×20 80	12.5×25 88
15						5×11 62	5×11 68	6.3×11 78	10×16 92	10×16 92	10×16 92	10×20 100	12.5×20 118	12.5×25 107	12.5×30 115
22						5×11 75	5×11 83	6.3×11 95	10×16 111	10×16 111	10×20 121	12.5×20 143	12.5×25 155	16×25 144	16×25 159
33						5×11 92	6.3×11 116	8×11.5 137	10×20 149	10×20 149	12.5×20 175	12.5×25 190	16×25 211	16×31.5 193	16×31.5 207
47					★ 5×11 96	★ 6.3×11 127	6.3×11 139	10×12.5 190	12.5×20 208	12.5×20 208	12.5×25 227	16×25 252	16×31.5 276	16×31.5 230	18×31.5 261
68				★ 5×11 108	6.3×11 132	8×11.5 180	8×11.5 197	10×16 251	12.5×25 273	16×20 279	16×25 303	16×31.5 332	18×35.5 373	18×31.5 285	18×35.5 335
82				6.3×11 137	6.3×11 145	8×11.5 198	8×11.5 216	10×20 290	12.5×25 302	16×25 333	16×31.5 364	18×35.5 369	18×40 387	18×31.5 327	18×40 370
100			5×11 119	6.3×11 151	6.3×11 160	8×11.5 218	8×11.5 239	10×20 332	12.5×25 331	16×25 368	16×31.5 402	18×35.5 407	18×40 427	18×40 486	
150		5×11 134	★ 6.3×11 167	6.3×11 185	8×11.5 231	10×12.5 310	10×12.5 340	12.5×20 477	16×25 450	16×35.5 517	18×35.5 554	18×40 523	22×41 596		
220	5×11 146	★ 5×11 162	6.3×11 203	8×11.5 264	8×11.5 280	10×12.5 376	10×16 451	12.5×25 630	16×31.5 596	18×35.5 671	18×40 694	22×41 721			
330	★ 6.3×11 206	6.3×11 228	8×11.5 293	8×11.5 324	10×12.5 399	10×16 504	10×20 603	16×25 856	18×35.5 822	18×40 850	22×41 968				
470	6.3×11 246	6.3×11 272	8×11.5 349	10×12.5 449	10×16 521	10×20 657	12.5×20 844	16×25 1021	18×40 1015	22×41 1155					
680	8×11.5 348	10×12.5 449	10×12.5 488	10×16 591	12.5×16 740	12.5×20 927	12.5×25 1107	16×31.5 1344	22×41 1390						
820	8×11.5 382	10×12.5 493	10×16 587	10×20 708	12.5×20 880	12.5×25 1050	16×25 1300	16×35.5 1627							
1000	8×11.5 422	10×12.5 544	10×16 648	10×20 820	12.5×20 974	12.5×25 1226	16×25 1490	18×40 1925							
1500	10×16 621	10×16 680	12.5×16 862	12.5×20 1017	16×20 1188	16×25 1442	16×35.5 1770								
2200	10×20 778	10×20 844	12.5×20 1055	12.5×20 1100 12.5×25 1235	16×25 1426	16×31.5 1442	16×35.5 1770								
3300	12.5×16 983	12.5×20 1148	12.5×25 1323	16×25 1562	16×35.5 1857	16×35.5 1794	18×40 2689								
4700	12.5×20 1219	12.5×25 1421	16×25 1657	16×31.5 1916	18×35.5 2224	Case size ØD×L (mm) Ripple current (mA rms) at 105°C, 120Hz									
6800	12.5×25 1480	16×25 1737	16×31.5 1982	18×35.5 2335											
10000	16×25 1807	16×35.5 2172	18×35.5 2409												
15000	16×35.5 2233	18×35.5 2482													
22000	18×40 2652														


Size Ø8×9 is available for capacitors marked "★"

TYPICAL PERFORMANCE

— 16V 1000 μ F
 400V 10 μ F


● TEMPERATURE CHARACTERISTICS

Capacitance change vs. temperature

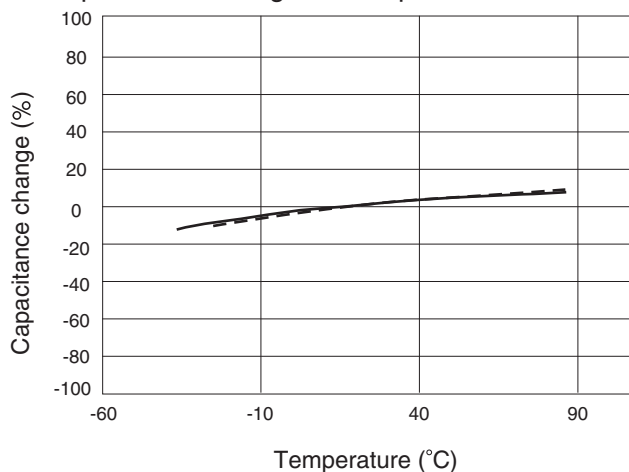


● LOAD LIFE (at +105°C)


Capacitance change vs. time

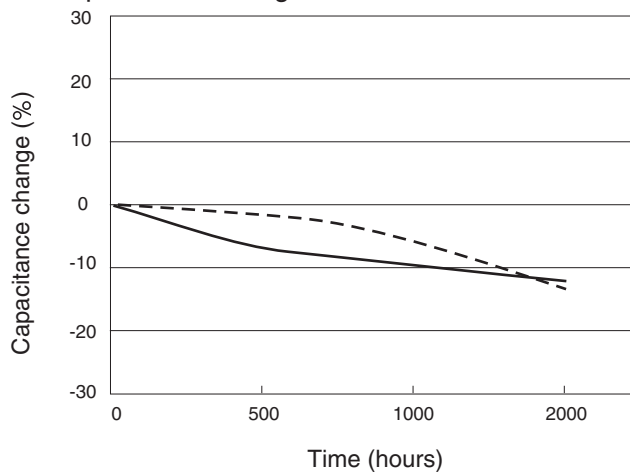

Dissipation factor vs. temperature

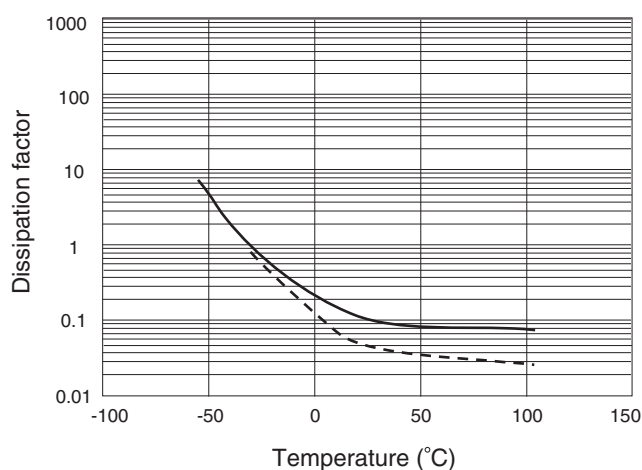


Dissipation factor vs. time

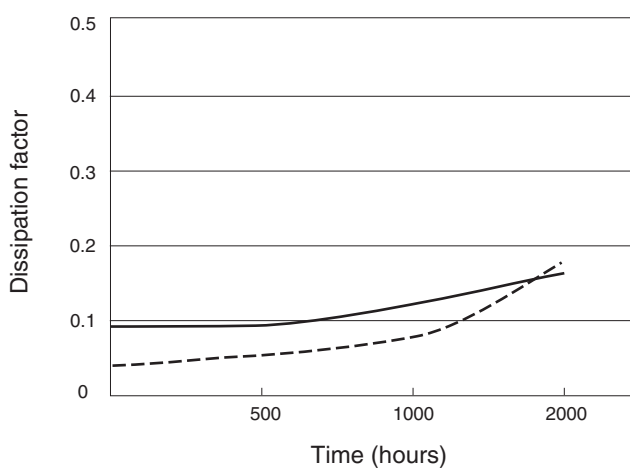


● FREQUENCY CHARACTERISTICS

Impedance vs. frequency

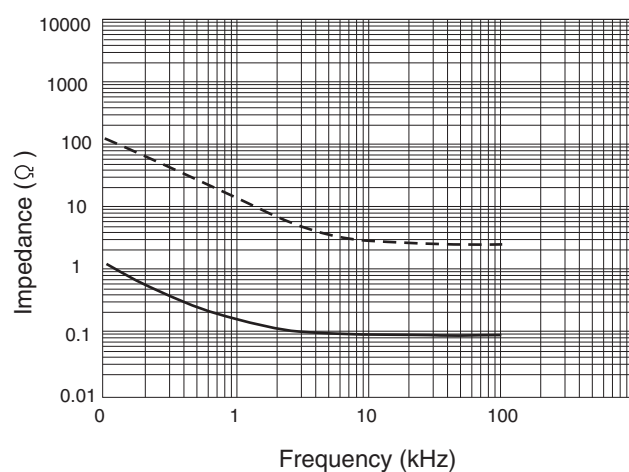

Leakage current vs. time

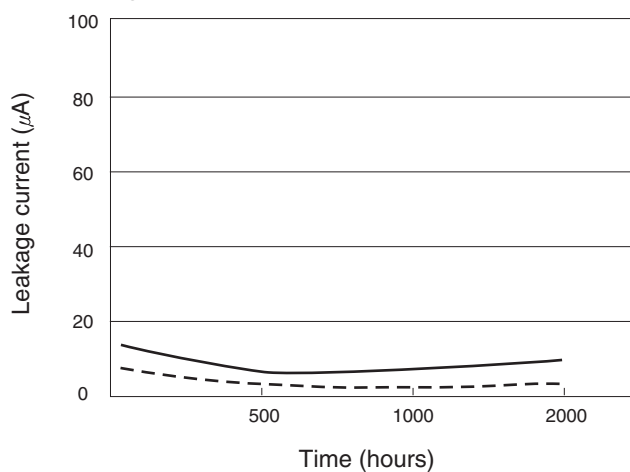


RM

Wide Temperature Range, Miniaturized Series

M Miniaturized
S Solvent Proof
WV ≤ 100V

RD → **RM**
Miniature




- Miniature size compared with RD series
- High CV value
- Wide operating temperature range of -55 ~ +105°C
- Complied to the RoHS directive

Item	Characteristics											
Operating temperature range	WV		6.3 ~ 100					160 ~ 450				
	Temperature range		-55 ~ +105°C					-40 ~ +105°C				
Leakage current max.	WV ≤ 100								WV > 100			
	I = 0.01CV or 3μA whichever is greater (after 2 min) I = 0.03CV or 4μA whichever is greater (after 1 min)								I = 0.02CV+15μA (after 5 min)			
Capacitance tolerance	±20% at 120Hz, 20°C											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.											
	WV	6.3	10	16	25	35	50	63	100	160~250	350~450	
	tanδ	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.15	0.20	
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3	10	16	25	35	50~100	160	200~250	350~400	450
	Z-25°C/Z+20°C		5	4	3	2	2	2	3	4	6	8
	Z-40°C/Z+20°C		10	8	6	4	3	3	4	8	10	12
Load life (after application of the rated voltage for 2000 hours at 105°C)	Leakage current					Less than specified value						
	Capacitance change					Within ±20% of initial value						
	tanδ					Less than 200% of specified value						
	ØD				ØD ≤ 8				ØD ≥ 10			
	Life time				1000 hours				2000 hours			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4											

DRAWING

Unit : mm

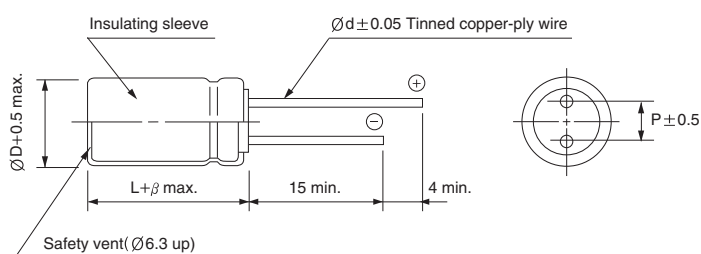

ØD	6.3	8	10	12.5	16	18
P	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5	2.0				

MINIATURE TYPES

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	Frequency µF	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
6.3~100	~ 47	0.75	1.00	1.55	2.00	2.00	2.00
	68 ~ 680	0.80	1.00	1.35	1.50	1.62	1.75
	1000 ~	0.85	1.00	1.15	1.15	1.32	1.50
160~450	~ 220	0.80	1.00	1.40	1.60	1.70	1.80
	330 ~	0.90	1.00	1.13	1.15	1.32	1.50

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



RM series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450
1.0														6.3×11 13
2.2												6.3×11 23	8×11.5 28	8×11.5 23
3.3											6.3×11 30	8×11.5 34	8×11.5 34	10×12.5 33
4.7										6.3×11 34	8×11.5 40	8×11.5 40	10×12.5 47	10×12.5 39
6.8										8×11.5 49	10×12.5 56	10×12.5 56	10×16 62	10×16 52
10									8×11.5 59	8×11.5 59	10×12.5 68	10×16 75	10×16 75	10×20 68
15									10×12.5 84	10×12.5 84	10×16 92	10×16 92	12.5×20 115	12.5×20 96
22									10×12.5 102	10×16 111	10×16 111	12.5×20 139	12.5×20 140	12.5×25 127
33								8×11.5 139	10×16 136	10×20 149	10×20 149	12.5×25 180	16×25 211	16×25 177
47								10×12.5 190	10×20 177	12.5×20 203	12.5×20 203	16×25 252	16×25 252	16×31.5 231
68								10×12.5 229	12.5×25 267	16×20 279	12.5×25 267	16×31.5 303	16×31.5 332	16×35.5 291
100						8×11.5 218	8×11.5 239	10×16 304	12.5×25 324	16×25 368	16×25 368	18×31.5 432	18×35.5 453	18×40 397
150						8×11.5 267	10×12.5 293	10×20 372	16×25 450	16×25 450	16×31.5 450	18×35.5 554		
220				6.3×11 224	8×11.5 280	10×12.5 376	10×16 451	12.5×20 564	16×31.5 596	18×31.5 641	18×35.5 671			
330			6.3×11 248	8×11.5 324	10×12.5 400	10×16 504	10×20 603	16×25 856	18×31.5 784	18×40 863				
470		6.3×11 272	8×11.5 349	8×11.5 386	10×16 521	10×20 657	12.5×20 824	16×25 1021	18×40 1030					
680	8×11.5 348	8×11.5 386	8×11.5 420	10×12.5 540	10×16 627	12.5×20 905	12.5×25 1082	16×31.5 1344						
1000	8×11.5 422	8×11.5 469	10×12.5 592	10×16 717	12.5×20 974	12.5×25 1197	16×25 1490	18×35.5 1835						
1500	10×16 621	10×16 680	10×20 797	12.5×20 993	12.5×25 1136	16×31.5 1578	18×31.5 1812							
2200	10×16 713	10×16 774	10×20 898	12.5×25 1206	16×25 1426	16×31.5 1709								
3300	10×20 909	10×20 978	12.5×20 1184	16×25 1562	18×31.5 1900	18×35.5 2152								
4700	12.5×20 1189	12.5×20 1272	12.5×25 1459	16×25 1752	16×35.5 2073									
6800	12.5×25 1445	16×25 1529	16×25 1811	16×35.5 2176	18×40 2510	← Case size ØD×L (mm) ← Ripple current (mA rms) at 105°C, 120Hz								
10000	16×25 1807	16×25 1892	16×31.5 2140	18×35.5 2497										
15000	16×31.5 2128	16×35.5 2313	18×35.5 2545											
22000	18×31.5 2411	18×35.5 2595												

RK Wide Temperature Range, Height 7mmL Series


- Super miniature series with 7mmL height
- High performance and excellent temperature characteristics
- Wide operating temperature range of -55 ~ +105°C
- Complied to the RoHS directive



Item	Characteristics								
Operating temperature range	-55 ~ +105°C								
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 1 minute)								
Capacitance tolerance	±20% at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	4	6.3	10	16	25	35	50	63
	tanδ	0.35	0.22	0.19	0.15	0.12	0.12	0.10	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV		4	6.3	10	16	25, 35		50, 63
	Z-25°C/Z+20°C		6	4	3	2	2		2
	Z-40°C/Z+20°C		12	10	8	6	4		3
Load life (after application of the rated voltage for 1000 hours at 105°C)	Leakage current			Less than specified value					
	Capacitance change			Within ±20% of initial value					
	tanδ			Less than 200% of specified value					
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

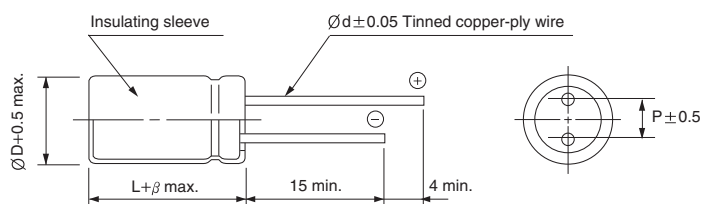

ØD	4	5	6.3
P	1.5	2.0	2.5
Ød	0.45	0.5	0.5
β	1.0	1.5	1.5

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

µF \ WV	4	6.3	10	16	25	35	50	63
1.0							4×7	9.1
2.2							4×7	14
3.3						4×7	5×7	19
4.7					4×7	5×7	6.3×7	26
6.8				4×7	5×7	5×7	6.3×7	32
10			4×7	5×7	5×7	6.3×7		
22		4×7	5×7	5×7	6.3×7			
33	4×7	5×7	6.3×7	6.3×7				
47	4×7	5×7	6.3×7					
68	5×7	6.3×7						

Ripple current (mA rms) at 105°C, 120Hz
Case size ØD×L (mm)



FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 47	0.75	1.00	1.55	2.00	2.00	2.00
68 ~	0.80	1.00	1.35	1.50	1.62	1.75

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RE Wide Temperature Range, Height 5mmL Series


- Ultra miniature series with 5mmL height
- Wide operating temperature range of -55 ~ +105°C
- Suitable to replace tantalum capacitors at low cost
- Complied to the RoHS directive



Item	Characteristics							
Operating temperature range	-55 ~ +105°C							
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes)							
Capacitance tolerance	±20% at 120Hz, 20°C							
Dissipation factor max. (at 120Hz, 20°C)	WV	4	6.3	10	16	25	35	50
	tanδ	0.35	0.27	0.23	0.19	0.15	0.13	0.11
Low temperature characteristics (Impedance ratio at 120Hz)	WV		4	6.3	10	16	25~50	
	Z-25°C/Z+20°C		7	3	3	2	2	
	Z-40°C/Z+20°C		12	8	5	4	3	
Load life (after application of the rated voltage for 1000 hours at 105°C)	Leakage current			Less than specified value				
	Capacitance change			Within ±25% of initial value				
	tanδ			Less than 200% of specified value				
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4							

DRAWING

Unit : mm

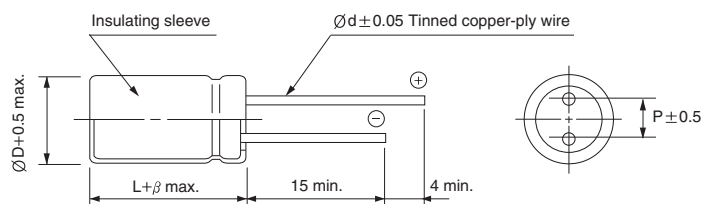

ØD	4	5	6.3	8
P	1.5	2.0	2.5	2.5
Ød	0.45	0.45	0.45	0.45
β	1.0	1.5		

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	4		6.3		10		16		25		35		50	
1.0													4×5	7.7
1.5													4×5	9.4
2.2													4×5	11
3.3											4×5	13	4×5	14
4.7									4×5	14	4×5	15	5×5	19
6.8									4×5	17	5×5	21	5×5	23
10			4×5	15	4×5	17	4×5	18	5×5	24	5×5	26	6.3×5	33
15	4×5	17	4×5	19	4×5	21	5×5	26	5×5	29	6.3×5	37	6.3×5	40
22	4×5	20	4×5	23	5×5	29	5×5	32	6.3×5	42	6.3×5	45	8×5	58
33	4×5	25	5×5	32	5×5	35	6.3×5	45	6.3×5	51	8×5	65	8×5	71
47	4×5	29	5×5	39	6.3×5	49	6.3×5	54	8×5	72	8×5	77		
68	5×5	41	6.3×5	55	6.3×5	59	8×5	77	8×5	87				
100	5×5	50	6.3×5	66	8×5	85	8×5	93						
150	6.3×5	71	8×5	96	8×5	104								
220	8×5	102	8×5	116										

↑
Ripple current (mA rms) at 105°C, 120Hz
Case size ØD × L (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF \ Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 47	0.75	1.00	1.55	2.00	2.00	2.00
68 ~	0.80	1.00	1.35	1.50	1.62	1.75

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



ZS High Ripple Current, Height 7mmL Series

M Miniaturized **S** Solvent Proof **IZI** Low Impedance


- Super miniature series with 7mmL height
- High ripple current compared with RK series
- Load life of 2000 hours at 105°C
- Complied to the RoHS directive

RK → **ZS**
High Ripple



Item	Characteristics						
Operating temperature range	-40 ~ +105°C						
Leakage current	I = 0.01CV or 3 μ A whichever is greater (after 2 minutes) I = 0.03CV or 4 μ A whichever is greater (after 1 minute)						
Capacitance tolerance	$\pm$ 20% at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50
	tan δ	0.22	0.19	0.16	0.14	0.12	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50
	Z-25°C / Z+20°C	2	2	2	2	2	2
	Z-40°C / Z+20°C	6	4	3	3	3	3
Load life	After an application of DC bias voltage plus the rated AC ripple current for 2000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.						
	Leakage current			Less than specified value			
	Capacitance change			Within $\pm$ 25% of the initial value			
	tan δ			Less than 200% of the specified value			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tan δ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4						

DRAWING

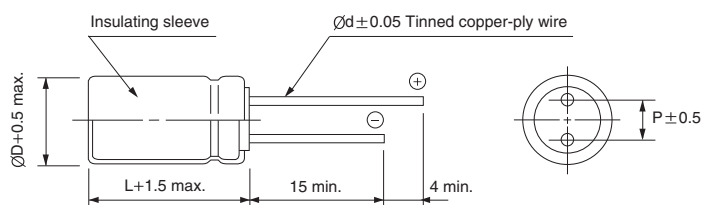

Unit : mm

ØD	5	6.3	8
P	2.0	2.5	3.5
Ød	0.5	0.5	0.5

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item µF	6.3			10			16			25			35			50		
	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
2.2																5×7	2.00	165
4.7																5×7	2.00	165
10																6.3×7	0.90	235
22													5×7	1.40	165	6.3×7	0.90	260
33	5×7	1.40	165	5×7	1.40	165	5×7	1.40	165	5×7	1.40	165	6.3×7	0.70	235	8×7	0.50	350
47	5×7	1.40	165	5×7	1.40	165	5×7	1.40	165	6.3×7	0.70	235	8×7	0.34	350	8×7	0.50	450
68	6.3×7	0.70	235	6.3×7	0.70	235	6.3×7	0.70	235	6.3×7	0.70	235	8×7	0.34	350			
100	6.3×7	0.70	235	6.3×7	0.70	235	6.3×7	0.70	235	8×7	0.34	350						
150	6.3×7	0.70	235	6.3×7	0.70	235	8×7	0.34	350									
220	8×7	0.34	350	8×7	0.34	350												
330	8×7	0.34	350															

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33		0.35	0.55	0.75	0.87	1.00
47 ~ 150		0.40	0.60	0.80	0.90	1.00
220 ~		0.50	0.65	0.85	0.92	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ZL High Ripple Current, Height 7mmL Series

M Miniaturized **S** Solvent Proof **IZI** Low Impedance

- Super miniature series with 7mmL height
- Load life of 3000 hours at 105°C
- Complied to the RoHS directive


zs → **ZL**
High Ripple



Item	Characteristics						
Operating temperature range	-40 ~ +105°C						
Leakage current	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)						
Capacitance tolerance	±20% at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50
	Z-25°C / Z+20°C	2	2	2	2	2	2
	Z-40°C / Z+20°C	6	4	3	3	3	3
Load life	After an application of DC bias voltage plus the rated AC ripple current for 3000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.						
	Leakage current			Less than specified value			
	Capacitance change			Within ±25% of the initial value			
	tanδ			Less than 200% of the specified value			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4						

DRAWING

Unit : mm

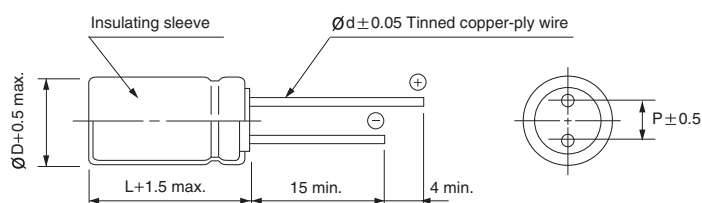

ØD	5	6.3	8
P	2.0	2.5	3.5
Ød	0.5	0.5	0.5

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25			35			50		
	ØD×L	Imp.(Ω)	Ripple	ØD×L	Imp.(Ω)	Ripple	ØD×L	Imp.(Ω)	Ripple	ØD×L	Imp.(Ω)	Ripple	ØD×L	Imp.(Ω)	Ripple	ØD×L	Imp.(Ω)	Ripple
	(mm)	max. 20°C 100kHz	current (mA rms) 105°C 100kHz	(mm)	max. 20°C 100kHz	current (mA rms) 105°C 100kHz	(mm)	max. 20°C 100kHz	current (mA rms) 105°C 100kHz	(mm)	max. 20°C 100kHz	current (mA rms) 105°C 100kHz	(mm)	max. 20°C 100kHz	current (mA rms) 105°C 100kHz	(mm)	max. 20°C 100kHz	current (mA rms) 105°C 100kHz
2.2																5×7	1.00	165
10																6.3×7	0.45	235
22													5×7	0.84	165	6.3×7	0.45	235
33	5×7	0.84	165	5×7	0.84	165	5×7	0.84	165	5×7	0.84	165	6.3×7	0.42	235	8×7	0.30	350
47	5×7	0.84	165	5×7	0.84	165	5×7	0.84	165	6.3×7	0.42	235	8×7	0.20	350	8×7	0.25	350
68	6.3×7	0.42	235	6.3×7	0.42	235	6.3×7	0.42	235	6.3×7	0.42	235	8×7	0.20	350			
100	6.3×7	0.42	235	6.3×7	0.42	235	6.3×7	0.42	235	8×7	0.20	350						
150	6.3×7	0.42	235	6.3×7	0.42	235	8×7	0.20	350									
220	8×7	0.20	350	8×7	0.20	350												
330	8×7	0.20	350															

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT (See page 111)

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



High Ripple Current, Height 5mmL Series



Miniaturized



Solvent Proof



Low Impedance




- Super miniature series with 5mmL height
- High ripple current & high temperature with RE series
- Load life of 2000 hours at 105°C
- Complied to the RoHS directive



Item	Characteristics					
Operating temperature range	-55 ~ +105°C					
Leakage current	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)					
Capacitance tolerance	±20% at 120Hz, 20°C					
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35
	tanδ	0.22	0.20	0.18	0.14	0.12
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35
	Z-25°C / Z+20°C	3	3	2	2	2
	Z-40°C / Z+20°C	9	7	5	3	3
Load life	After an application of DC bias voltage plus the rated AC ripple current for 2000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.					
	Leakage current		Less than specified value			
	Capacitance change		Within ±20% of the initial value			
	tanδ		Less than 200% of the specified value			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4					

DRAWING

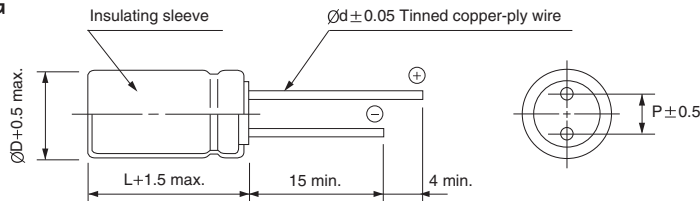

Unit : mm

ØD	5	6.3
P	2.0	2.5
Ød	0.45	0.45

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25			35		
	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Imp.(Ω) max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1													5×5	2.40	100
1.5													5×5	2.40	100
2.2													5×5	2.40	100
3.3													5×5	2.40	100
4.7													5×5	2.40	100
6.8													5×5	2.40	100
10										5×5	2.40	100	5×5	2.40	100
15							5×5	2.40	100	5×5	2.40	100	5×5	2.40	100
22							5×5	2.40	100	5×5	2.40	100	6.3×5	0.75	140
33	5×5	2.40	100	5×5	2.40	100	5×5	2.40	100	6.3×5	0.75	140	6.3×5	0.75	140
47	5×5	2.40	100	5×5	2.40	100	6.3×5	0.75	140	6.3×5	0.75	140			
68	6.3×5	0.75	140	6.3×5	0.75	140	6.3×5	0.75	140						
100	6.3×5	0.75	140	6.3×5	0.75	140									


FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33		0.35	0.55	0.75	0.87	1.00
47 ~		0.40	0.60	0.80	0.90	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ZT Long Life, Height 7mmL Series


- Super miniature series with 7mmL height
- Load life of 5000 hours at 105°C
- Complied to the RoHS directive, Halogen-Free



Item	Characteristics						
Operating temperature range	-40 ~ +105°C						
Leakage current max.	I = 0.01CV or 3μA (after 2 minutes)						
Capacitance tolerance	±20% at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50
	tanδ	0.40	0.35	0.30	0.25	0.20	0.20
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	6	4	4	3	3	3
	Z-40°C/Z+20°C	12	10	8	6	6	6
Load life (after application of the rated voltage for 5000 hours at 105°C)	Leakage current		Less than specified value				
	Capacitance change		Within ±30% of initial value				
	tanδ		Less than 300% of specified value				
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4						

DRAWING

Unit : mm

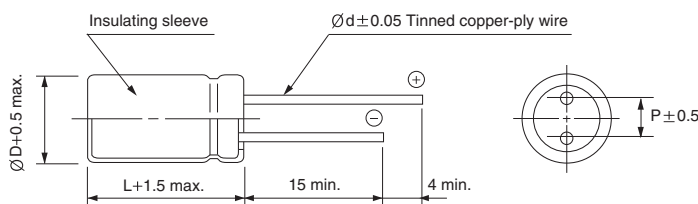

ØD	5	6.3	8
P	2.0	2.5	3.5
Ød	0.5	0.5	0.5

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	6.3		10		16		25		35		50	
2.2											5×7	165
10											6.3×7	235
22									5×7	165	6.3×7	260
33	5×7	165	5×7	165	5×7	165	5×7	165	6.3×7	235	8×7	350
47	5×7	165	5×7	165	5×7	165	6.3×7	235	8×7	350	8×7	450
68	6.3×7	235	6.3×7	235	6.3×7	235	6.3×7	235	8×7	350		
100	6.3×7	235	6.3×7	235	6.3×7	235	8×7	350				
150	6.3×7	235	6.3×7	235	8×7	350	↑↑ Ripple current (mA rms) at 105°C, 100kHz Case size ØD×L (mm)					
220	8×7	350	8×7	350								
330	8×7	350										

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT


μF \ Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33	0.25	0.50	0.75	0.90	1.00
47 ~	0.30	0.55	0.80	0.90	1.00

RZ Low Impedance Series

Long Life
 Solvent Proof
 Low Impedance

- Low impedance at high frequency
- High reliability withstanding 5000 hours load life at 105°C (2000/3000 hours for smaller case sizes as specified below)
- Ideally suited for use in switching power supplies
- Complied to the RoHS directive


$\Rightarrow$ RP Long life



Item	Characteristics							
Operating temperature range	-55 ~ +105°C							
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)							
Capacitance tolerance	±20% at 120Hz, 20°C							
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value							
	WV	6.3	10	16	25	35	50	63
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3, 10		16 ~ 35		50, 63	
	Z-55°C/Z+20°C		4		3		2	
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.							
	Leakage current				Less than specified value			
	Capacitance change				Within ±20% of initial value			
	tanδ				Less than 200% of specified value			
	ØD		ØD ≤ 6.3		ØD = 8		ØD ≥ 10	
	Life time		2000 hours		3000 hours		5000 hours	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4							
	Leakage current				Less than specified value			
	Capacitance change				Within ±20% of initial value			
	tanδ				Less than 150% of specified value			

DRAWING

Unit : mm

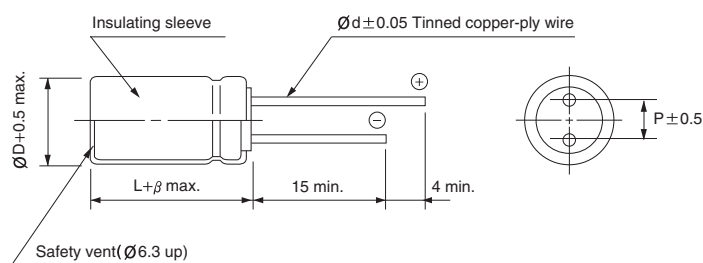

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33	0.40	0.65	0.82	0.91	1.00
47 ~ 270	0.50	0.70	0.84	0.92	1.00
330 ~ 680	0.55	0.75	0.86	0.93	1.00
1000 ~ 1500	0.60	0.80	0.88	0.94	1.00
2200 ~	0.70	0.85	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RZ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT


WV Item μF	6.3			10			16			25		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33										5×11	0.80	155
47							5×11	0.80	155	6.3×11	0.55	210
68				5×11	0.80	155	6.3×11	0.50	220	6.3×11	0.36	260
100	5×11	0.85	150	6.3×11	0.55	210	6.3×11	0.35	265	8×11.5	0.24	383
150	6.3×11	0.49	225	6.3×11	0.35	265	8×11.5	0.23	388	8×11.5	0.16	460
220	6.3×11	0.30	285	8×11.5	0.24	387	8×11.5	0.16	460	10×12.5	0.13	600
330	8×11.5	0.20	292	8×11.5	0.16	460	10×12.5	0.12	625	10×16	0.095	750
470	10×12.5	0.14	575	10×12.5	0.13	600	10×16	0.09	770	10×20	0.065	1020
680	10×16	0.11	700	10×16	0.09	770	10×20	0.065	1020	12.5×20	0.046	1392
1000	10×20	0.075	950	10×20	0.060	1060	12.5×20	0.047	1411	12.5×25	0.036	1660
1500	10×25	0.055	1220	12.5×20	0.045	1417	12.5×25	0.036	1660	16×20	0.034	1770
2200	12.5×20	0.043	1438	12.5×25	0.034	1710	16×20	0.033	1800	16×25	0.028	2051
3300	12.5×25	0.034	1710	16×20	0.031	1850	16×25	0.027	2095	16×35.5	0.020	2680
4700	16×25	0.032	1935	16×31.5	0.023	2420	16×35.5	0.020	2680	18×40	0.018	2960
6800	16×31.5	0.024	2370	16×35.5	0.020	2680	18×35.5	0.018	2900			
10000	16×40	0.020	2750	18×40	0.017	3040						
15000	18×40	0.018	2960									

WV Item μF	35			50			63		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5 × 11	4.00	36			
1.5				5 × 11	3.80	45			
2.2				5 × 11	3.50	54			
3.3				5 × 11	3.00	66			
4.7				5 × 11	2.20	81			
6.8				5 × 11	1.80	91			
10				5 × 11	1.80	115	5 × 11	1.80	135
15				5 × 11	1.60	145	6.3 × 11	1.00	185
22	5 × 11	0.75	160	6.3 × 11	1.40	195	6.3 × 11	1.00	215
33	6.3 × 11	0.49	225	6.3 × 11	1.20	240	8 × 11.5	0.80	320
47	6.3 × 11	0.34	270	8 × 11.5	0.80	344	8 × 11.5	0.80	365
68	8 × 11.5	0.24	384	8 × 11.5	0.65	410	10 × 12.5	0.23	495
100	8 × 11.5	0.16	460	10 × 16	0.40	581	10 × 20	0.16	750
150	10 × 12.5	0.12	625	10 × 20	0.30	820	10 × 25	0.12	950
220	10 × 16	0.09	770	10 × 25	0.20	1040	12.5 × 20	0.085	1140
330	10 × 20	0.060	1060	12.5 × 20	0.12	1281	12.5 × 25	0.060	1420
470	12.5 × 20	0.046	1401	12.5 × 25	0.085	1500	16 × 25	0.055	1700
680	12.5 × 25	0.036	1660	16 × 20	0.060	1630	16 × 31.5	0.032	2050
1000	16 × 20	0.034	1770	16 × 31.5	0.040	2120	18 × 35.5	0.029	2280
1500	16 × 31.5	0.028	2385	16 × 40	0.035	2410			
2200	16 × 35.5	0.020	2680	18 × 40	0.030	2560			
3300	18 × 40	0.017	3040						

WL Low Impedance Series

Long Life
 Solvent Proof
 Low Impedance
 WV ≤ 100V

WL $\Rightarrow$ WF
 Long life




- Wide voltage compared with RZ series
- Operating temperature range of $-40 \sim +105^{\circ}\text{C}$
- Low impedance at high frequency
- High reliability withstanding 5000 hours load life at 105°C
- For E-meter
- Complied to the RoHS directive

Item	Characteristics										
Operating temperature range	WV		6.3 ~ 450					500			
	Temperature range		-40 ~ +105°C					-25 ~ +105°C			
Leakage current max.	WV ≤ 100							WV > 100			
	I = 0.01CV or 3μA whichever is greater (after 2 min.) I = 0.03CV or 4μA whichever is greater (after 1 min.)							I = 0.02CV + 15μA (after 5 min.)			
Capacitance tolerance	±20% at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.										
	WV	6.3	10	16	25	35	50	63	100	160~250	350~500
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.20
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3	10	16	25 ~ 100	160 ~ 250	350 ~ 450	500		
	Z-25°C/Z+20°C		4	3	2	2	3	6	8		
	Z-40°C/Z+20°C		8	6	4	3	4	10	-		
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Leakage current				Less than specified value						
	Capacitance change				Within ±25% of initial value						
	tanδ				Less than 200% of specified value						
	Life time		ØD = 5, 6.3			ØD = 8			ØD ≥ 10		
	WV ≤ 100		2000 hours			3000 hours			5000 hours		
	WV > 100		2000 hours								
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4										

DRAWING

Unit : mm

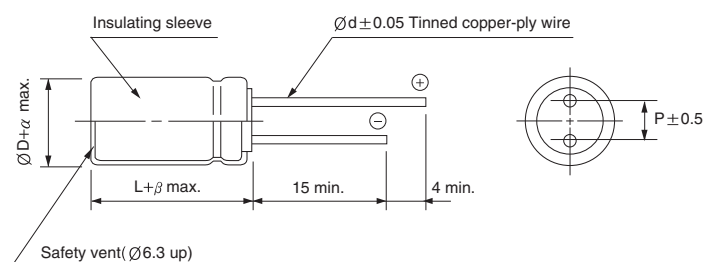

ØD	5	6.3	8	10	12.5	16	18	20	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8	1.0
α	0.5							1.0	
β	1.5			2.0				3.0	

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33	0.40	0.65	0.82	0.91	1.00
39 ~ 270	0.50	0.70	0.84	0.92	1.00
330 ~ 680	0.55	0.75	0.86	0.93	1.00
820 ~ 1800	0.60	0.80	0.88	0.94	1.00
2200 ~	0.70	0.85	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

WL series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
10							5×11	0.90	180	5×11	0.90	180
22	5×11	0.70	180	5×11	0.70	180	5×11	0.70	180	5×11	0.70	180
33	5×11	0.70	180	5×11	0.70	180	5×11	0.70	180	5×11	0.70	180
47	5×11	0.65	180	5×11	0.65	180	5×11	0.65	180	5×11	0.65	180
100	5×11	0.65	180	5×11	0.65	180	6.3×11	0.30	280	6.3×11	0.30	280
150	6.3×11	0.30	280	6.3×11	0.30	280	6.3×11	0.30	280	8×11.5	0.20	450
220	6.3×11	0.30	280	6.3×11	0.30	280	8×11.5	0.14	450	8×11.5	0.20	450
330	6.3×11	0.30	280	8×11.5	0.14	450	8×11.5	0.14	450	10×12.5	0.10	660
470	8×11.5	0.14	450	8×11.5	0.14	450	10×12.5	0.10	660	10×16	0.080	850
680	10×12.5	0.10	660	10×12.5	0.10	660	10×16	0.080	850	10×20	0.054	1100
1000	10×12.5	0.10	660	10×16	0.080	850	10×20	0.054	1100	12.5×20	0.050	1400
1500	10×20	0.054	1100	10×20	0.054	1100	12.5×20	0.050	1400	16×20	0.030	2100
2200	12.5×20	0.050	1400	12.5×20	0.050	1400	12.5×25	0.038	1700	16×25	0.030	2100
3300	12.5×20	0.050	1400	12.5×25	0.038	1700	16×25	0.030	2100	16×31.5	0.025	2600
4700	16×25	0.030	2100	16×25	0.030	2100	16×31.5	0.025	2600	18×35.5	0.022	3000
6800	16×25	0.030	2100	16×31.5	0.025	2600	18×35.5	0.022	3000			
10000	16×31.5	0.025	2600	18×35.5	0.022	3000						
15000	18×35.5	0.022	3000									

WV Item μF	35			50			63			100		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5×11	3.5	40						
2.2				5×11	3.0	55				5×11	2.5	52
3.3				5×11	2.6	65	5×11	2.0	64	5×11	2.5	64
4.7	5×11	0.90	180	5×11	2.3	90	5×11	2.0	76	5×11	2.5	76
10	5×11	0.90	180	5×11	1.4	120	5×11	2.0	111	6.3×11	1.0	128
22	5×11	0.70	180	5×11	1.2	150	6.3×11	0.60	190	8×11.5	0.60	224
33	5×11	0.65	180	6.3×11	0.60	200	6.3×11	0.60	233	10×12.5	0.40	319
47	6.3×11	0.30	280	6.3×11	0.43	250	8×11.5	0.50	328	10×16	0.30	417
100	8×11.5	0.20	450	8×11.5	0.24	340	10×16	0.12	456	12.5×20	0.15	570
150	8×11.5	0.14	450	10×12.5	0.17	490	10×20	0.10	610	12.5×25	0.12	762
220	10×12.5	0.10	660	10×16	0.12	650	10×25	0.090	809	16×25	0.070	1250
330	10×16	0.080	850	10×20	0.10	810	12.5×20	0.085	1036	16×31.5	0.050	1404
470	10×20	0.054	1100	12.5×20	0.085	1100	16×20	0.050	1411	18×40	0.030	1980
680	12.5×20	0.050	1400	12.5×25	0.065	1200	16×25	0.043	1843	18×40	0.030	2050
820	12.5×25	0.045	1500	16×25	0.055	1300	18×25	0.035	1900	18×40	0.030	2215
1000	12.5×25	0.038	1700	16×25	0.043	1600	16×35.5	0.025	1967			
1500	16×25	0.030	2100	16×31.5	0.038	2000						
2200	16×31.5	0.025	2600	18×35.5	0.034	2300						
3300	18×35.5	0.022	3000									

WL series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	160		200		250		350	
	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz
1	6.3×11	45						
10	10×16	230			10×20	300	10×20	180
22	10×20	440	10×20	440	12.5×20	480	12.5×20	270
33	10×20	560	12.5×20	590	12.5×25	630	16×20	600
47	12.5×20	725	12.5×20	780	12.5×25	630	16×25	700
68	12.5×25	950	12.5×25	950	16×25	1000	16×31.5	1100
82					16×25	1100	16×35.5	1130
100	16×25	1280	16×25	1280	16×31.5	1400	18×31.5	1170
120							18×35.5	1200
150	16×31.5	1300	16×25	1500	18×25 18×31.5	1450	18×40	1250
220	16×31.5	1300	18×31.5	1700	18×35.5 18×40	1485		
330	18×31.5	1700	18×35.5	1900				

WV Item μF	400		420		450		500	
	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz
3.3					10×20	150		
4.7					12.5×20	200		
10	10×16 10×20	176 180			10×16 12.5×25	230 315	12.5×20 12.5×25	240 260
22	12.5×25	300			12.5×25 16×25	525 570	12.5×30 16×25	420 470
33	16×20	600			16×25	600	18×31.5	560
47	16×25	700	16×25	630	16×25 16×31.5 18×25	660 720 720	16×35.5 18×31.5 18×35.5	650 620 700
56			16×31.5 18×25	740	16×31.5 18×25	800 800	16×40	740
68	16×31.5	1100	16×35.5 18×25	810	16×35.5 18×31.5	900 900	16×45 18×40	820 900
82	16×35.5	1150	16×40 18×31.5	960 900	16×40 18×31.5 18×35.5	1115 1115 1200	16×50 18×40	1000 1000
100	18×35.5	1200	16×40 18×35.5	1100	16×40 18×35.5	1100 1200	16×50 18×45 20×41	1250 1250 1250
120	18×40	1270	16×50 18×40	1250 1200	16×50 18×40	1500 1500	22×45	1370
150	20×41	1380			20×41	1600		

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RP

Low Impedance
Series




Low Impedance



Long Life



Solvent Proof




- High reliability long life(10000 hours)
- Operating temperature $-55 \sim +105^{\circ}\text{C}$
- Enabled high ripple current by a reduction of impedance at high frequency
- Ideally suited for use in switching power supply, main board
- Complied to the RoHS directive



Item	Characteristics						
Operating temperature range	-55 ~ +105°C						
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes)						
Capacitance tolerance	±20% at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.						
	WV	6.3	10	16	25	35	50
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3	10	16 ~ 25		35 ~ 50
	Z-55°C/Z+20°C		3	3	3		3
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.						
	Leakage current			Less than specified value			
	Capacitance change			Within ±20% of initial value			
	tanδ			Less than 200% of specified value			
	ØD		ØD = 5, 6.3	ØD = 8	ØD = 10	ØD ≥ 12.5	
	Life time		4000 hours	6000 hours	7000 hours	10000 hours	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4						

DRAWING

Unit : mm

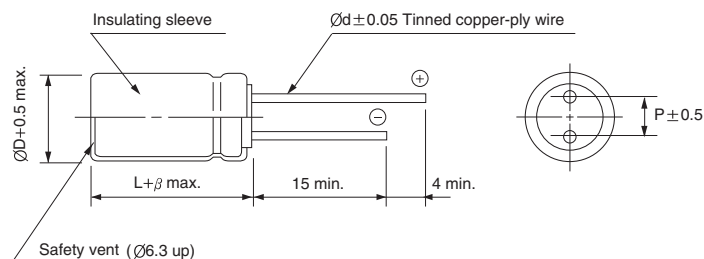

$\varnothing\text{D}$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing\text{d}$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency μF	120Hz	1kHz	10kHz	50kHz	100kHz $\leq$
~ 33	0.40	0.65	0.82	0.91	1.00
39 ~ 270	0.50	0.70	0.84	0.92	1.00
330 ~ 680	0.55	0.75	0.86	0.93	1.00
820 ~ 1800	0.60	0.80	0.88	0.94	1.00
2200 ~	0.70	0.85	0.90	0.95	1.00

RP series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT


WV Item μF	6.3			10			16		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
47							5 × 11	0.65	180
68				5 × 11	0.65	180	6.3 × 11	0.30	280
100	5 × 11	0.65	180	5 × 11	0.65	180	6.3 × 11	0.30	280
150	5 × 11	0.65	280	6.3 × 11	0.30	280	6.3 × 11	0.30	280
220	6.3 × 11	0.30	280	6.3 × 11	0.30	280	8 × 11.5	0.14	450
330	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.14	450
470	8 × 11.5	0.14	450	8 × 11.5	0.14	450	10 × 12.5	0.10	660
680	10 × 12.5	0.10	660	10 × 12.5	0.10	660	10 × 16	0.08	850
1000	10 × 12.5	0.10	660	10 × 16	0.08	850	10 × 20	0.054	1100
1500	10 × 20	0.054	1100	10 × 20	0.054	1100	12.5 × 20	0.050	1400
2200	12.5 × 20	0.050	1400	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700
3300	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700	16 × 25	0.030	2100
4700	16 × 25	0.030	2100	16 × 31.5	0.030	2100	16 × 25	0.025	2600
6800	16 × 25	0.030	2100	16 × 31.5	0.025	2600	16 × 35.5	0.022	3000
10000	16 × 31.5	0.025	2600	18 × 35.5	0.022	3000			
15000	18 × 35.5	0.022	3000						

WV Item μF	25			35			50		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0							5 × 11	3.5	40
2.2							5 × 11	3.0	55
3.3							5 × 11	2.6	65
4.7							5 × 11	2.3	90
6.8							5 × 11	1.4	120
10							5 × 11	1.4	120
22				5 × 11	0.70	180	5 × 11	1.2	150
33	5 × 11	0.70	180	5 × 11	0.65	180	6.3 × 11	0.85	200
47	5 × 11	0.65	180	6.3 × 11	0.30	280	6.3 × 11	0.70	250
68	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.24	340
100	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.24	340
150	8 × 11.5	0.14	450	8 × 11.5	0.14	450	10 × 12.5	0.17	490
220	8 × 11.5	0.14	450	10 × 12.5	0.10	660	10 × 16	0.12	650
330	10 × 12.5	0.10	660	10 × 16	0.080	850	10 × 20	0.10	810
470	10 × 16	0.080	850	10 × 20	0.054	1100	12.5 × 20	0.085	1100
680	10 × 20	0.054	1100	12.5 × 20	0.050	1400	12.5 × 25	0.065	1200
1000	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700	16 × 31.5	0.043	1600
1500	16 × 25	0.030	1400	16 × 31.5	0.030	2100	16 × 31.5	0.038	2000
2200	16 × 25	0.030	2100	16 × 31.5	0.025	2600	18 × 35.5	0.034	2300
3300	16 × 31.5	0.025	2600	18 × 35.5	0.022	3000			
4700	18 × 35.5	0.022	3000						

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

WF High ripple current,
Extremely Low Impedance Series

IZI Low Impedance
LL Long Life
S Solvent Proof




- Operating temperature range of $-40 \sim +105^{\circ}\text{C}$
- Extremely low impedance at high frequency
- High reliability withstanding 10000 hours load life at 105°C
- For E-meter
- Complied to the RoHS directive

WL $\Rightarrow$ WF
Long life

Item	Characteristics								
Operating temperature range	-40 ~ +105°C								
Leakage current max.	I = 0.03CV or 3μA whichever is greater (after 2 minutes)								
Capacitance tolerance	±20% at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.								
	WV	6.3	10	16	25	35	50	63	100
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3		10		16		25 ~ 100
	Z-40°C/Z+20°C		8		6		4		3
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Leakage current				Less than specified value				
	Capacitance change				Within ±25% of initial value				
	tanδ				Less than 200% of specified value				
	ØD		ØD = 5, 6.3		ØD = 8, 10		ØD ≥ 12.5		
	Life time		5000 hours		7000 hours		10000 hours		
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

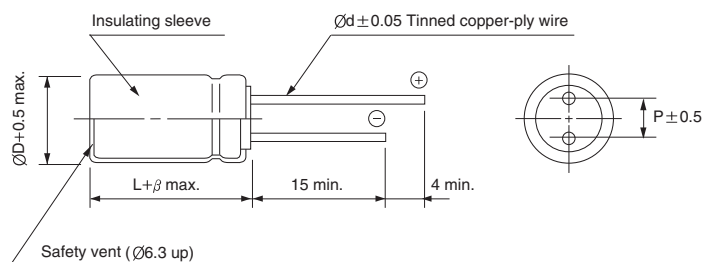

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz $\leq$
μF					
~ 33	0.40	0.65	0.82	0.91	1.00
39 ~ 270	0.50	0.70	0.84	0.92	1.00
330 ~ 680	0.55	0.75	0.86	0.93	1.00
820 ~ 1800	0.60	0.80	0.88	0.94	1.00
2200 ~	0.70	0.85	0.90	0.95	1.00

WF series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33										5×11	0.90	150
47							5×11	0.90	150	5×11	0.90	150
100	5×11	0.90	150	5×11	0.90	150	6.3×11	0.40	250	6.3×11	0.40	250
220	6.3×11	0.40	250	6.3×11	0.40	250	8×11.5	0.25	400	8×11.5	0.25	400
330	6.3×11	0.40	250	8×11.5	0.25	400	8×11.5	0.25	400	10×12.5	0.16	580
470	8×11.5	0.25	400	8×11.5	0.25	400	10×12.5	0.16	580	10×16	0.120	770
1000	10×12.5	0.16	580	10×16	0.120	770	10×20	0.078	1050	12.5×20	0.062	1300
2200	12.5×20	0.062	1300	12.5×20	0.062	1300	12.5×25	0.048	1650	16×25	0.034	1850
3300	12.5×20	0.062	1300	12.5×25	0.048	1650	16×25	0.034	1850	16×31.5	0.029	2000
4700	16×25	0.034	1850	16×25	0.034	1850	16×31.5	0.029	2000	18×35.5	0.025	2200
6800	16×25	0.034	1850	16×31.5	0.029	2000	18×35.5	0.025	2200			
10000	16×31.5	0.029	2000	18×35.5	0.025	2200						
15000	18×35.5	0.025	2200									


WV Item μF	35			50			63			100		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5×11	4.0	50				5×11	4.5	20
2.2				5×11	2.5	55				5×11	3.0	30
3.3				5×11	2.2	65				5×11	2.7	40
4.7				5×11	1.9	88				5×11	2.5	65
10				5×11	1.5	100	5×11	2.3	87	6.3×11	1.2	140
22				5×11	0.9	150	6.3×11	1.30	140	8×11.5	0.63	160
33	5×11	0.90	150	6.3×11	0.40	250	6.3×11	1.20	140	10×12.5	0.43	230
47	6.3×11	0.4	250	6.3×11	0.4	400	8×11.5	0.63	210	10×12.5	0.43	230
										10×16	0.31	290
100	8×11.5	0.25	400	8×11.5	0.25	500	10×12.5	0.43	300	12.5×16	0.23	750
										12.5×20	0.16	
220	10×12.5	0.16	580	10×16	0.12	770	10×25	0.210	520	16×25	0.073	900
330	10×16	0.120	770	10×20	0.08	1050	12.5×20	0.160	660	16×25	0.073	900
390	10×20	0.095	900	10×20	0.075	1170	12.5×25	0.140	700	12.5×34.5	0.073	1650
470	10×20	0.078	1050	12.5×20	0.062	1300	12.5×25	0.120	750			
1000	12.5×25	0.048	1650	16×25	0.034	1850	16×31.5	0.054	1390			
2200	16×31.5	0.029	2000	18×35.5	0.025	2200						
3300	18×35.5	0.025	2200									

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

LK High Ripple Current Series




- Enabled high ripple current by a reduction of impedance at high frequency
- High reliability withstanding 5000 hours load life at 105°C
(2000 ~ 4000 hours for smaller case sizes as specified below)
- Complied to the RoHS directive



Item	Characteristics								
Operating temperature range	WV		6.3 ~ 63				100		
	temperature range		-55 ~ +105°C				-40 ~ +105°C		
Leakage current max.	I = 0.01CV or 3 μ A whichever is greater (after 2 minutes) I = 0.03CV or 4 μ A whichever is greater (after 1 minute)								
Capacitance tolerance	$\pm$ 20% at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000 μ F : tan δ increases by 0.02 for each 1000 μ F from below value.								
	WV	6.3	10	16	25	35	50	63	100
	tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	Z-55°C / Z+20°C				Z-25°C / Z+20°C				
	3				2				
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Leakage current			Less than specified value					
	Capacitance change			Within $\pm$ 25% of the initial value					
	tan δ			Less than 200% of the specified value					
	$\varnothing$ D		$\varnothing$ D = 5, 6.3		$\varnothing$ D = 8		$\varnothing$ D = 10		$\varnothing$ D $\geq$ 12.5
Life time		2000 hours		3000 hours		4000 hours		5000 hours	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tan δ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

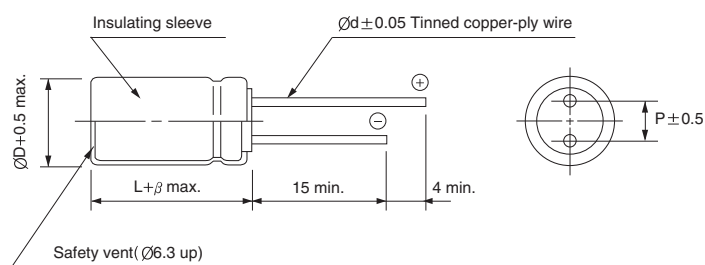

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz≤
μF					
~ 33	0.32	0.60	0.80	0.90	1.00
39 ~ 270	0.40	0.63	0.82	0.91	1.00
330 ~ 680	0.45	0.67	0.84	0.92	1.00
820 ~ 1800	0.50	0.70	0.86	0.93	1.00
2200 ~	0.60	0.75	0.88	0.94	1.00

LK series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT


WV Item μF	6.3			10			16			25		
	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33										5 × 11	0.800	200
47							5 × 11	0.800	200	5 × 11	0.550	200
100	5 × 11	0.850	200	5 × 11	0.600	200	8 × 11.5	0.350	550	8 × 11.5	0.240	550
150	8 × 11.5	0.490	550	8 × 11.5	0.350	550	8 × 11.5	0.240	550	10 × 12.5	0.160	927
220	8 × 11.5	0.300	550	8 × 11.5	0.240	550	10 × 12.5	0.160	927	10 × 12.5	0.130	927
330	8 × 11.5	0.240	550	10 × 12.5	0.160	927	10 × 12.5	0.130	927	10 × 16	0.095	1100
470	10 × 12.5	0.140	927	10 × 12.5	0.130	927	10 × 16	0.095	1100	10 × 20	0.075	1280
680	10 × 16	0.110	1100	10 × 16	0.095	1100	10 × 20	0.075	1280	10 × 25	0.055	1495
1000	10 × 20	0.075	1280	10 × 20	0.075	1280	10 × 25	0.055	1495	12.5 × 25	0.043	2100
1500	10 × 25	0.055	1495	10 × 25	0.055	1495	12.5 × 25	0.043	2100	16 × 25	0.034	2607
2200	12.5 × 25	0.043	2100	12.5 × 25	0.043	2100	12.5 × 30	0.034	2480	16 × 31.5	0.032	2840
3300	12.5 × 30	0.034	2480	16 × 25	0.034	2607	16 × 31.5	0.032	2840	16 × 35.5	0.029	3017
4700	16 × 31.5	0.032	2840	16 × 31.5	0.032	2840	16 × 35.5	0.029	3017	18 × 40	0.027	3379
6800	16 × 35.5	0.029	3017	16 × 35.5	0.029	3017	18 × 40	0.027	3379			

WV Item μF	35			50			63			100		
	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5 × 11	4.00	36						
2.2				5 × 11	3.50	54				5 × 11	5.00	38
3.3				5 × 11	3.00	66				5 × 11	5.00	44
4.7				5 × 11	2.20	74				5 × 11	5.00	53
10				5 × 11	2.000	115	5 × 11	1.06	135	6.3 × 11	2.00	89
22	5 × 11	2.000	200	5 × 11	1.800	160	6.3 × 11	0.520	215	8 × 11.5	1.200	159
33	5 × 11	1.500	200	6.3 × 11	1.200	285	8 × 11.5	0.350	320	10 × 12.5	0.800	221
47	8 × 11.5	0.700	550	8 × 11.5	0.700	550	8 × 11.5	0.250	365	10 × 16	0.600	350
100	10 × 12.5	0.200	927	10 × 12.5	0.200	927	10 × 20	0.120	750	12.5 × 20	0.300	405
150	10 × 12.5	0.160	927	10 × 16	0.160	1100	10 × 25	0.090	950	12.5 × 25	0.250	541
220	10 × 16	0.120	1100	10 × 20	0.095	1280	12.5 × 20	0.065	1140	16 × 25	0.150	885
330	10 × 20	0.095	1280	10 × 25	0.075	1495	12.5 × 25	0.049	1420	16 × 31.5	0.100	991
470	10 × 25	0.075	1495	12.5 × 25	0.055	2100	16 × 25	0.042	1700	18 × 40	0.068	1401
680	12.5 × 25	0.055	2100	16 × 25	0.043	2770	16 × 31.5	0.032	2050			
1000	12.5 × 30	0.043	2480	16 × 31.5	0.034	2840	18 × 35.5	0.029	2280			
1500	16 × 31.5	0.034	2840	16 × 35.5	0.032	3017						
2200	16 × 35.5	0.032	3017	18 × 40	0.029	3379						
3300	18 × 40	0.029	3379									

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



High Ripple Current Series




- Ripple current compared with LK series
- Enabled high ripple current by a reduction of impedance at high frequency
- High reliability withstanding 5000 hours load life at 105°C (2000 ~ 3000 hours for smaller case sizes as specified below)
- Complied to the RoHS directive



Item	Characteristics								
Operating temperature range	-40 ~ +105°C								
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)								
Capacitance tolerance	±20% at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.								
	WV	6.3	10	16	25	35	50	63	100
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C					Z-25°C / Z+20°C			
	3					2			
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Leakage current				Less than specified value				
	Capacitance change				Within ±25% of the initial value				
	tanδ				Less than 200% of the specified value				
	ØD		ØD = 5, 6.3		ØD = 8		ØD ≥ 10		
	Life time		2000 hours		3000 hours		5000 hours		
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

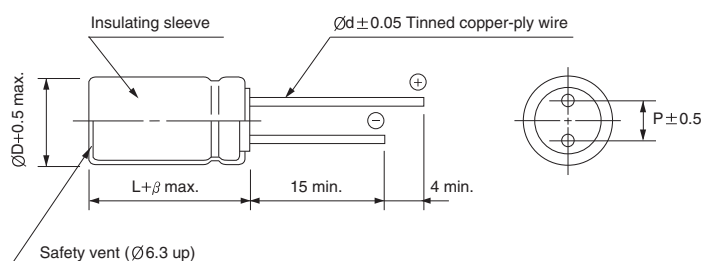

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
μF					
~ 33	0.40	0.65	0.82	0.94	1.00
39 ~ 270	0.50	0.70	0.84	0.96	1.00
330 ~ 680	0.55	0.75	0.86	0.96	1.00
820 ~ 1800	0.60	0.80	0.88	0.97	1.00
2200 ~	0.70	0.85	0.90	0.97	1.00

MK series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
10							5 × 11	1.000	250	5 × 11	1.000	250
22	5 × 11	0.525	250	5 × 11	0.525	250	5 × 11	1.000	250	5 × 11	0.525	250
33	5 × 11	0.525	250	5 × 11	0.525	250	5 × 11	0.525	250	5 × 11	0.525	250
47	5 × 11	0.450	250	5 × 11	0.450	250	5 × 11	0.450	250	5 × 11	0.450	250
100	5 × 11	0.450	250	5 × 11	0.450	250	5 × 11	0.450	250	6.3 × 11	0.300	405
							6.3 × 11	0.300	405			
150	6.3 × 11	0.300	405	6.3 × 11	0.300	405	6.3 × 11	0.225	405	8 × 11.5	0.160	760
220	6.3 × 11	0.225	405	6.3 × 11	0.225	405	8 × 11.5	0.108	760	8 × 11.5	0.160	760
330	6.3 × 11	0.225	405	8 × 11.5	0.175	760	8 × 11.5	0.108	760	10 × 12.5	0.098	1030
390	8 × 11.5	0.108	550	8 × 11.5	0.150	760	8 × 15	0.098	880	8 × 15	0.098	1030
							10 × 12.5	0.098	880	10 × 12.5	0.098	1030
470	8 × 11.5	0.108	760	8 × 11.5	0.150	760	8 × 11.5	0.108	760	10 × 12.5	0.098	1030
							8 × 15	0.098	1030	10 × 16	0.065	1430
							10 × 12.5	0.088	1030	10 × 20	0.060	1500
560	8 × 15	0.098	880	8 × 15	0.098	880	8 × 20	0.088	1030	8 × 20	0.088	1430
	10 × 12.5	0.098	880	10 × 12.5	0.098	880	10 × 16	0.088	1030	10 × 16	0.088	1430
680	10 × 12.5	0.088	1030	8 × 15	0.098	1030	10 × 16	0.065	1430	10 × 16	0.065	1430
				10 × 12.5	0.088					10 × 20	0.050	1820
820	10 × 16	0.075	1030	10 × 12.5	0.088	1030	10 × 16	0.065	1450	10 × 20	0.050	2000
1000	10 × 16	0.065	1430	8 × 20	0.088	1030	8 × 20	0.088	1500	10 × 20	0.050	2100
				10 × 12.5			10 × 16	0.065		10 × 25	0.045	2360
				10 × 16			10 × 20	0.050		12.5 × 20	0.043	2600
1200				10 × 16	0.065	1820				12.5 × 20	0.043	2650
1500	10 × 20	0.050	1820	10 × 20	0.050	1820	10 × 25	0.043	2360	12.5 × 25	0.029	2770
							12.5 × 20			16 × 20	0.029	2880
1800	10 × 20	0.050	1820	12.5 × 20	0.043	2000	12.5 × 25	0.029	2450	12.5 × 25	0.029	2900
2200	12.5 × 20	0.043	2360	10 × 20	0.05	1820						
				10 × 25	0.048	2360	10 × 30	0.029	2770	12.5 × 25	0.029	3000
				12.5 × 20	0.043		12.5 × 25			16 × 25	0.024	3114
3300	12.5 × 20	0.040	2360	12.5 × 25	0.029	3140	16 × 25	0.024	3200	16 × 31.5	0.024	3312
				16 × 20								
4700	16 × 25	0.024	3114	16 × 25	0.024	3200	16 × 31.5	0.024	3312	18 × 35.5	0.022	3420
6800	16 × 25	0.024	3114	16 × 31.5	0.024	3312	18 × 35.5	0.022	3420			
10000	16 × 31.5	0.024	3312	18 × 35.5	0.022	3420						
15000	18 × 35.5	0.022	3420									

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS


MK series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	35			50			63			100		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5 × 11	3.00	250						
2.2				5 × 11	3.00	250				5 × 11	3.000	125
3.3				5 × 11	1.50	250	5 × 11	2.000	165	5 × 11	2.000	125
4.7	5 × 11	0.525	250	5 × 11	1.50	250	5 × 11	2.000	165	5 × 11	2.000	125
10	5 × 11	0.525	250	5 × 11	1.000	250	5 × 11	0.800	165	6.3 × 11	1.200	205
22	5 × 11	0.525	250	5 × 11	0.500	250	6.3 × 11	0.500	265	8 × 11.5	0.600	355
33	5 × 11	0.450	250	6.3 × 11	0.300	405	6.3 × 11	0.500	265	10 × 12.5	0.250	450
47	6.3 × 11	0.330	405	6.3 × 11	0.300	405	8 × 11.5	0.300	500	8 × 15	0.300	500
										10 × 16	0.200	580
56	6.3 × 11	0.330	405	8 × 11.5	0.160	580	10 × 12.5	0.160	680	10 × 16	0.160	750
100	8 × 11.5	0.160	760	8 × 11.5	0.160	760	10 × 16	0.100	945	10 × 20	0.150	800
				8 × 15	0.108	770				12.5 × 20	0.100	1045
150	8 × 11.5	0.160	760	10 × 12.5	0.088	1030	10 × 20	0.080	1100	12.5 × 25	0.080	1195
220	8 × 15	0.098	1030	10 × 16	0.065	1430	10 × 25	0.070	1300	16 × 25	0.060	1600
	10 × 12.5	0.088	1030									
330	10 × 16	0.065	1430	10 × 20	0.050	1820	12.5 × 20	0.050	1495	16 × 31.5	0.040	1750
390	8 × 20	0.088	1430	10 × 20	0.050	1820	12.5 × 25	0.039	1600	16 × 31.5	0.040	1750
470	8 × 20	0.088	1430	12.5 × 20	0.043	2360	16 × 20	0.035	1990	18 × 40	0.030	2060
	10 × 16	0.065	1820									
	10 × 20	0.050	1820									
680	10 × 20	0.050	1820	12.5 × 25	0.029	2770	16 × 25	0.030	2780			
	12.5 × 20	0.043	2360									
1000	12.5 × 20	0.043	2500	16 × 25	0.027	3114	16 × 35.5	0.020	2835			
	12.5 × 25	0.032	2770									
1500	12.5 × 25	0.029	2770	16 × 31.5	0.024	3312						
	16 × 20	0.027	2880									
	16 × 25	0.024	3114									
2200	16 × 31.5	0.024	3312	18 × 35.5	0.022	3420						
3300	18 × 35.5	0.022	3420									

MQ High Ripple Current Series

IZI Low Impedance **S** Solvent Proof




- High Ripple current with MK series
- Enabled high ripple current by a reduction of impedance at high frequency
- High reliability withstanding 5000 hours load life at 105°C
(2000 ~ 4000 hours for smaller case sizes as specified below)
- Complied to the RoHS directive

MK $\Rightarrow$ **MQ**
High Ripple

Item	Characteristics							
Operating temperature range	-40 ~ +105°C							
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)							
Capacitance tolerance	±20% at 120Hz, 20°C							
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.							
	WV	6.3	10	16	25	35	50	
	tanδ	0.22	0.19	0.16	0.14	0.12	0.1	
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C			Z-25°C / Z+20°C				
	3			2				
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.							
	Leakage current			Less than specified value				
	Capacitance change			Within ±25% of the initial value				
	tanδ			Less than 200% of the specified value				
	∅D	∅D = 5, 6.3		∅D = 8		∅D = 10		∅D ≥ 12.5
	Life time	2000 hours		3000 hours		4000 hours		5000 hours
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4							

DRAWING

Unit : mm

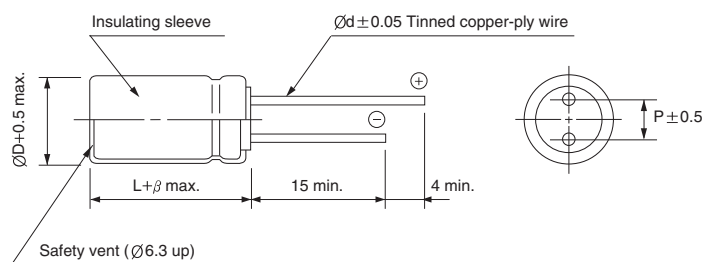

$\varnothing D$	5	6.3	8	10	12.5	16
P	2.0	2.5	3.5	5.0	5.0	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8
β	1.5			2.0		

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency μF	120Hz	1kHz	10kHz	50kHz	100kHz $\leq$
~ 33	0.30	0.65	0.82	0.94	1.00
47 ~ 270	0.40	0.70	0.84	0.96	1.00
330 ~ 680	0.45	0.75	0.86	0.96	1.00
820 ~ 1800	0.50	0.80	0.88	0.97	1.00
2200 ~	0.60	0.85	0.90	0.97	1.00